Multi-Wedged Pulleys Poly-V Sheaves

CAPT supplies the whole series of Multi-Wedged Pulleys (J3-M20) from DP 20mm to 710mm. The pulleys are available in standard straight and in taper lock bores.
Multi-Wedged Pulleys are made of GG25, GGG45, S45C or other materials requested by the customers.




The pulleys are machined by high precise CNC, dynamically balanced and black coated. They have the characteristics of high precision, steadiness and smooth transmission. They are suitable for all kinds of precise, high speed and heavy loaded transmission equipments. They can also be used on auto motors.
CAPT can provide specially designed Multi-Wedged Pulleys according to customers' requests.




Multi Wedged Pulleys

Poly-V sheaves



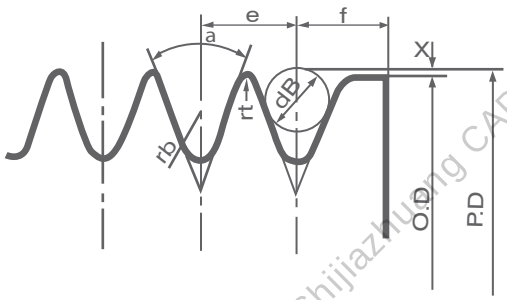


J - L - M

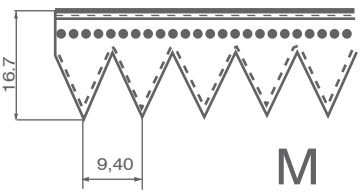
	 J	 L	 M
aº	40±0.5	40±0.5	40±0.5
x	0.014	0.052	0.097
e	0.092±0.001	0.185±0.002	0.373±0.002
f	0.013±0.003	0.019±0.003	0.034±0.004
rb(max)	0.016	0.024	0.03
f	0.118±0.02	0.394±0.04	0.551±0.04
dB	0.059±0.0004	0.138±0.0004	0.276±0.0004

Multi Wedged Pulleys


Poly-V sheaves

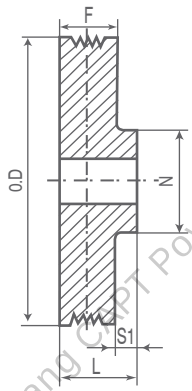


1S

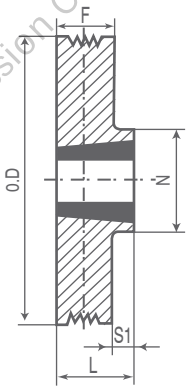


1

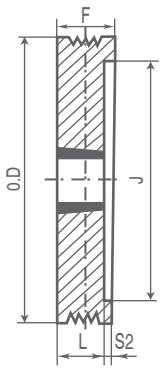


3A

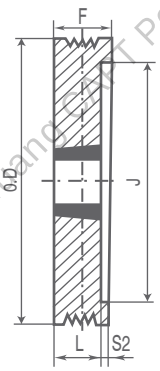


3B

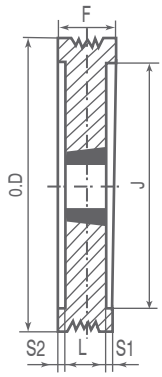


4

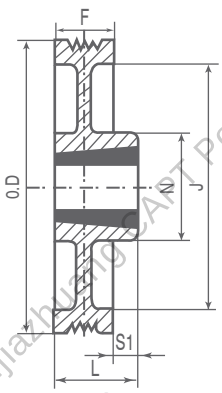


5A

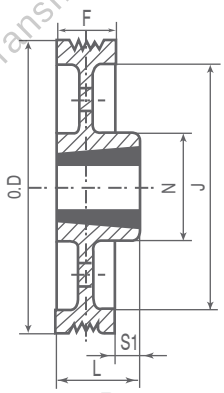


5B

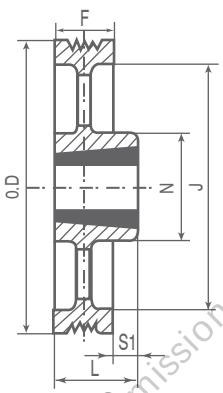


5C

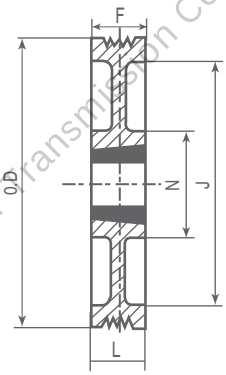


6A

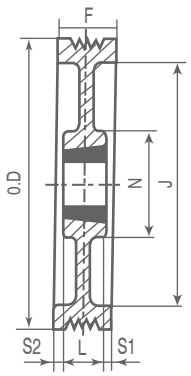

7A

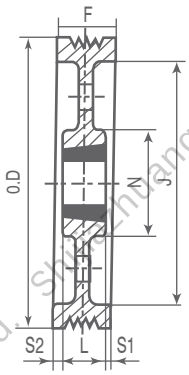

7B

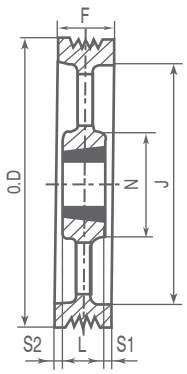

7C


Shijiazhuang CAPT Power Transmission Co., Ltd.

CAPT 凯普特传动

Multi-Wedged Pulleys

J3

Poly-V sheaves





PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs.
3J08S	—	0.79	1S	5/8	—	7/16	1	—	9/16	—	0.11
3J10S	—	1.00	1S	7/8	—	7/16	1	—	9/16	—	0.15
3J11S	—	1.10	1S	1	—	7/16	1	—	9/16	—	0.19
3J13S	—	1.26	1S	1 1/8	—	7/16	1	—	9/16	—	0.25
3J14S	—	1.42	1S	1 1/4	—	7/16	1	—	9/16	—	0.34
3J16S	—	1.58	1S	1 3/8	—	7/16	1	—	9/16	—	0.40
3J18S	—	1.77	1S	1 8/16	—	7/16	1	—	9/16	—	0.53
3J20S	—	2.00	1S	1 3/4	—	7/16	1	—	9/16	—	0.65
3J22S	—	2.24	1S	2	—	7/16	1	—	9/16	—	0.84
3J25TB	C1108	2.50	1	2 3/8	—	7/16	7/8	—	7/16	—	0.63
3J28TB	C1108	2.80	1	2 3/8	—	7/16	7/8	—	7/16	—	0.88
3J30TB	C1108	3.00	1	2 3/8	—	7/16	7/8	—	7/16	—	0.90
3J31TB	C1108	3.15	1	2 3/8	—	7/16	7/8	—	7/16	—	0.95
3J33TB	C1108	3.35	1	2 3/8	—	7/16	7/8	—	7/16	—	1.07
3J35TB	C1108	3.55	1	2 3/8	—	7/16	7/8	—	7/16	—	1.18
3J37TB	C1108	3.75	1	2 3/8	—	7/16	7/8	—	7/16	—	1.32
3J40TB	C1108	4.00	1	2 3/8	—	7/16	7/8	—	7/16	—	1.43
3J45TB	C1310	4.50	1	2 1/8	—	7/16	1	—	9/16	—	2.02
3J50TB	C1310	5.00	1	2 1/8	—	7/16	1	—	9/16	—	2.41
3J55TB	C1310	5.50	1	2 1/8	—	7/16	1	—	9/16	—	2.94
3J60TB	C1610	6.00	1	3 3/8	—	7/16	1	—	9/16	—	3.66
3J80TB	C2012	8.00	1	4 1/8	—	7/16	1 1/4	—	13/16	—	6.32


Bushing	Stock Bores																					
	3/8	7/16	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1	1 1/8	1 3/16	1 1/4	1 3/8	1 1/2	1 9/16	1 5/8	1 3/4	1 7/8	2
1108	●	●	●	●	●	●	●	●	●	●	●	△									
1310				●	●	●	●	●	●	●	●	●	●	●	●						
1610				●	●	●	●	●	●	●	●	●	●	●	●	●	●	△			
2012						●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Shijiazhuang CAPT Power Transmission Co., Ltd.

Multi Wedged Pulleys

J4

Poly-V sheaves

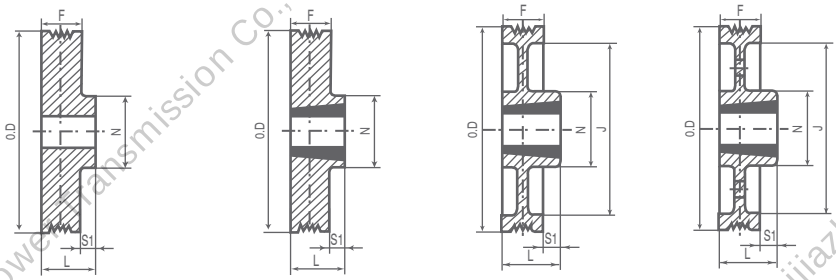

1S 1 5A 5B

PART NO.	Bushing	OD	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs.
4J08S	—	0.79	1S	5/8	—	1/2	1	—	1/2	—	0.01
4J10S	—	1.00	1S	7/8	—	1/2	1	—	1/2	—	0.15
4J11S	—	1.10	1S	1	—	1/2	1	—	1/2	—	0.19
4J13S	—	1.26	1S	1 1/8	—	1/2	1	—	1/2	—	0.25
4J14S	—	1.42	1S	1 1/4	—	1/2	1	—	1/2	—	0.34
4J16S	—	1.58	1S	1 3/8	—	1/2	1	—	1/2	—	0.40
4J18S	—	1.77	1S	1 9/16	—	1/2	1	—	1/2	—	0.53
4J20S	—	2.00	1S	1 3/4	—	1/2	1	—	1/2	—	0.67
4J22S	—	2.24	1S	2	—	1/2	1	—	1/2	—	0.84
4J25TB	C1108	2.50	1	2 3/8	—	1/2	7/8	—	3/8	—	0.63
4J28TB	C1108	2.80	1	2 3/8	—	1/2	7/8	—	3/8	—	0.88
4J30TB	C1108	3.00	1	2 3/8	—	1/2	7/8	—	3/8	—	0.97
4J31TB	C1108	3.15	1	2 3/8	—	1/2	7/8	—	3/8	—	1.03
4J33TB	C1108	3.35	1	2 3/8	—	1/2	7/8	—	3/8	—	1.20
4J35TB	C1108	3.55	1	2 3/8	—	1/2	7/8	—	3/8	—	1.28
4J37TB	C1108	3.75	1	2 3/8	—	1/2	7/8	—	3/8	—	1.60
4J40TB	C1108	4.00	1	2 3/8	—	1/2	7/8	—	3/8	—	1.66
4J45TB	C1310	4.50	1	3 1/8	—	1/2	1	—	1/2	—	2.16
4J50TB	C1310	5.00	1	3 1/8	—	1/2	1	—	1/2	—	2.66
4J55TB	C1310	5.50	1	3 1/8	—	1/2	1	—	1/2	—	3.29
4J60TB	C1610	6.00	1	3 3/8	—	1/2	1	—	1/2	—	4.16
4J80TB	C2012	8.00	5A	4 1/8	7 1/4	1/2	1 1/4	5/16	3/4	—	5.53
4J106TB	C2012	10.60	5A	4 1/8	9 1/4	1/2	1 1/4	5/16	3/4	—	7.60
4J124TB	C2012	12.40	5B	4 1/8	11 1/2	1/2	1 1/4	5/16	3/4	—	9.36

Bushing	Stock Bores																				
	3/8	7/16	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1	1 1/8	1 3/16	1 1/4	1 3/8	1 1/2	1 9/16	1 5/8	1 3/4	1 7/8	2
1108	●	●	●	●	●	●	●	●	●	●	●	△									
1310				●	●	●	●	●	●	●	●	●	●	●	●						
1610				●	●	●	●	●	●	●	●	●	●	●	●	●	●	△			
2012						●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


Shijiazhuang CAPT Power Transmission Co., Ltd.

CAPT 凯普特传动

Multi Wedged Pulleys

J5

Poly-V sheaves

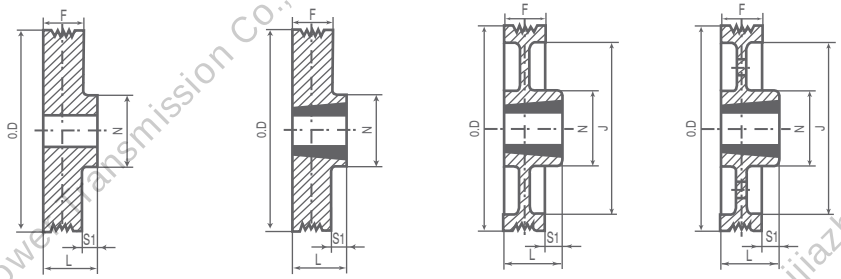

1S　　1　　5A　　5B

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs
5J08S	—	0.79	1S	5/8	—	5/8	13/8	—	3/4	—	0.17
5J10S	—	1.00	1S	7/8	—	5/8	13/8	—	3/4	—	0.19
5J11S	—	1.10	1S	1	—	5/8	13/8	—	3/4	—	0.26
5J13S	—	1.26	1S	11/8	—	5/8	13/8	—	3/4	—	0.30
5J14S	—	1.42	1S	11/4	—	5/8	13/8	—	3/4	—	0.41
5J16S	—	1.58	1S	13/8	—	5/8	13/8	—	3/4	—	0.49
5J18S	—	1.77	1S	19/16	—	5/8	13/8	—	3/4	—	0.81
5J20S	—	2.00	1S	13/4	—	5/8	13/8	—	3/4	—	0.87
5J22S	—	2.24	1S	2	—	5/8	13/8	—	3/4	—	1.03
5J25TB	1108	2.50	1	23/8	—	5/8	7/8	—	1/4	—	0.64
5J28TB	1108	2.80	1	23/8	—	5/8	7/8	—	1/4	—	0.92
5J30TB	1108	3.00	1	23/8	—	5/8	7/8	—	1/4	—	1.03
5J31TB	1108	3.15	1	23/8	—	5/8	7/8	—	1/4	—	1.11
5J33TB	1108	3.35	1	23/8	—	5/8	7/8	—	1/4	—	1.35
5J35TB	1108	3.55	1	23/8	—	5/8	7/8	—	1/4	—	1.44
5J37TB	1108	3.75	1	23/8	—	5/8	7/8	—	1/4	—	0.54
5J40TB	1108	4.00	1	23/8	—	5/8	7/8	—	1/4	—	1.80
5J45TB	1310	4.50	1	31/8	—	5/8	1	—	3/8	—	2.38
5J50TB	1310	5.00	1	31/8	—	5/8	1	—	3/8	—	2.97
5J55TB	1310	5.50	1	31/8	—	5/8	1	—	3/8		2.67
5J60TB	1610	6.00	1	33/8	—	5/8	1	—	3/8	—	4.78
5J80TB	2012	8.00	5A	41/8	184	5/8	11/4	3/8	5/8	—	5.85
5J106TB	2012	10.60	5A	41/8	234	5/8	11/4	3/8	5/8	—	8.00
5J124TB	2012	12.40	5B	41/8	293	5/8	11/4	3/8	5/8	—	9.93

Bushing	Stock Bores																				
	3/8	7/16	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1	11/8	13/16	11/4	13/8	11/2	19/16	15/8	13/4	17/8	2
1108	●	●	●	●	●	●	●	●	●	●	●	△									
1310				●	●	●	●	●	●	●	●	●	●	●	●						
1610				●	●	●	●	●	●	●	●	●	●	●	●	●	●	△			
2012						●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


Shijiazhuang CAPT Power Transmission Co., Ltd.

CAPT 凯普特传动

Multi Wedged Pulleys

J6

Poly-V sheaves

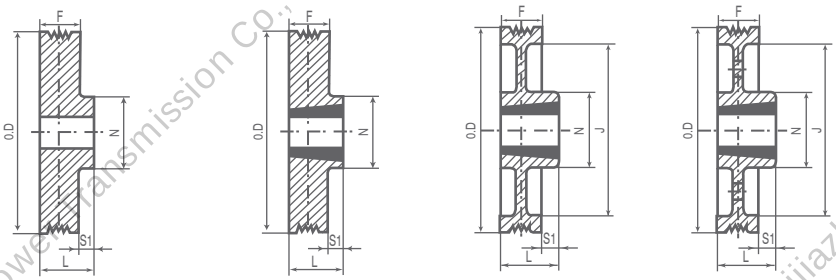

1S　　1　　5A　　5B

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs
6J08S	—	0.79	1S	5/8	—	3/4	13/8	—	5/8	—	0.19
6J10S	—	1.00	1S	7/8	—	3/4	13/8	—	5/8	—	0.21
6J11S	—	1.10	1S	1	—	3/4	13/8	—	5/8	—	0.28
6J13S	—	1.26	1S	11/8	—	3/4	13/8	—	5/8	—	0.30
6J14S	—	1.42	1S	11/4	—	3/4	13/8	—	5/8	—	0.41
6J16S	—	1.58	1S	13/8	—	3/4	13/8	—	5/8	—	0.49
6J18S	—	1.77	1S	19/16	—	3/4	13/8	—	5/8	—	0.64
6J20S	—	2.00	1S	13/4	—	3/4	13/8	—	5/8	—	0.81
6J22S	—	2.24	1S	2	—	3/4	13/8	—	5/8	—	1.05
6J25TB	1108	2.50	1	23/8	—	3/4	7/8	—	1/8	—	0.66
6J28TB	1108	2.80	1	23/8	—	3/4	7/8	—	1/8	—	0.92
6J30TB	1108	3.00	1	23/8	—	3/4	7/8	—	1/8	—	1.05
6J31TB	1108	3.15	1	23/8	—	3/4	7/8	—	1/8	—	1.20
6J33TB	1108	3.35	1	23/8	—	3/4	7/8	—	1/8	—	1.46
6J35TB	1108	3.55	1	23/8	—	3/4	7/8	—	1/8	—	1.58
6J37TB	1108	3.75	1	23/8	—	3/4	7/8	—	1/8	—	1.86
6J40TB	1108	4.00	1	23/8	—	3/4	7/8	—	1/8	—	1.99
6J45TB	1310	4.50	1	31/8	—	3/4	1	—	1/4	—	2.57
6J50TB	1310	5.00	1	31/8	—	3/4	1	—	1/4	—	3.26
6J55TB	1310	5.50	1	31/8	—	3/4	1	—	1/4		4.19
6J60TB	1610	6.00	1	33/8	—	3/4	1	—	1/4	—	5.35
6J80TB	2012	8.00	5A	41/8	71/4	3/4	11/4	3/8	1/2	—	6.04
6J106TB	2012	10.60	5A	41/8	91/4	3/4	11/4	3/8	1/2	—	8.26
6J124TB	2012	12.40	5B	41/8	111/2	3/4	11/4	3/8	1/2	—	10.02

Bushing	Stock Bores																					
	3/8	7/16	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1	11/8	13/16	11/4	13/8	11/2	19/16	15/8	13/4	17/8	2
1108	●	●	●	●	●	●	●	●	●	●	●	△									
1310				●	●	●	●	●	●	●	●	●	●	●	●						
1610				●	●	●	●	●	●	●	●	●	●	●	●	●	●	△			
2012						●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


Shijiazhuang CAPT Power Transmission Co., Ltd.

CAPT 凯普特传动


Multi-Wedged Pulleys

Poly-V sheaves


J8




1S




1




3A



5A



5B



5C


PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs
8J08S	—	0.79	1S	5/8	—	7/8	13/8	—	1/2	—	0.05
8J10S	—	1.00	1S	7/8	—	7/8	13/8	—	1/2	—	0.06
8J11S	—	1.10	1S	1	—	7/8	13/8	—	1/2	—	0.11
8J13S	—	1.26	1S	11/8	—	7/8	13/8	—	1/2	—	0.13
8J14S	—	1.42	1S	11/4	—	7/8	13/8	—	1/2	—	0.07
8J16S	—	1.58	1S	13/8	—	7/8	13/8	—	1/2	—	0.22
8J18S	—	1.77	1S	19/16	—	7/8	13/8	—	1/2	—	0.27
8J20S	—	2.00	1S	13/4	—	7/8	13/8	—	1/2	—	0.34
8J22S	—	2.24	1S	2	—	7/8	13/8	—	1/2	—	0.62
8J25TB	1108	2.50	3A	—	—	7/8	7/8	—	—	—	0.86
8J28TB	1210	2.80	1	21/2	—	7/8	1	—	1/8	—	1.03
8J30TB	1210	3.00	1	23/4	—	7/8	1	—	1/8	—	1.25
8J31TB	1210	3.15	1	23/4	—	7/8	1	—	1/8	—	1.48
8J33TB	1210	3.35	1	3	—	7/8	1	—	1/8	—	1.50
8J35TB	1210	3.55	1	3	—	7/8	1	—	1/8	—	1.67
8J37TB	1610	3.75	1	33/8	—	7/8	1	—	1/8	—	1.95
8J40TB	1610	4.00	1	33/8	—	7/8	1	—	1/8	—	2.26
8J42TB	1610	4.20	1	33/8	—	7/8	1	—	1/8	—	2.78
8J44TB	1610	4.40	1	33/8	—	7/8	1	—	1/8	—	3.15
8J46TB	1610	4.65	1	33/8	—	7/8	1	—	1/8	—	3.53
8J50TB	1610	5.00	1	33/8	—	7/8	1	—	1/8	—	3.64
8J52TB	1610	5.20	1	33/8	—	7/8	1	—	1/8	—	3.85
8J55TB	1610	5.50	1	33/8	—	7/8	1	—	1/8	—	4.13
8J63TB	2012	6.30	1	41/8	—	7/8	11/4	—	3/8	—	4.18
8J71TB	2012	7.10	5A	41/8	61/2	7/8	11/4	1/2	3/8	—	4.93
8J80TB	2012	8.00	5A	41/8	71/4	7/8	11/4	1/2	3/8	—	5.18
8J88TB	2012	8.80	5A	41/8	81/8	7/8	11/4	1/2	3/8	—	5.69
8J106TB	2012	10.60	5A	41/8	91/4	7/8	11/4	1/2	3/8	—	6.98
8J110TB	2012	11.00	5B	41/8	103/8	7/8	11/4	1/2	3/8	—	11.13
8J124TB	2517	12.40	5B	43/4	111/2	7/8	13/4	5/8	7/8	—	12.40
8J140TB	2517	14.00	5C	43/4	133/8	7/8	13/4	9/16	7/8	—	12.85
8J160TB	2517	15.80	5C	43/4	141/2	7/8	13/4	9/16	7/8	—	13.92

Shijiazhuang CAPT Power Transmission Co., Ltd.


Multi V-edged Pulleys

J12


Poly-V sheaves




1S




3A




6A




3B

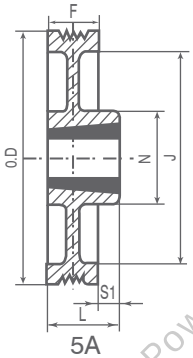

5A

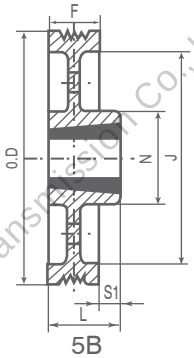

5B

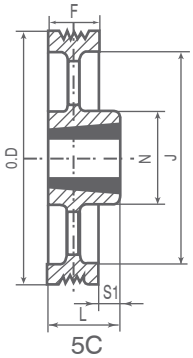

5C


PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	kg
12J13S	—	1.26	1S	1 1/8	—	1 1/4	1 9/16	—	5/16	—	0.13
12J14S	—	1.42	1S	1 1/4	—	1 1/4	1 9/16	—	5/16	—	0.19
12J16J	—	1.58	1S	1 5/8	—	1 1/4	1 9/16	—	5/16	—	0.22
12J18S	—	1.77	1S	1 9/16	—	1 1/4	1 9/16	—	5/16	—	0.28
12J20S	—	2.00	1S	1 3/4	—	1 1/4	1 9/16	—	5/16	—	0.36
12J22S	—	2.24	1S	2	—	1 1/4	1 9/16	—	5/16	—	0.46
12J25TB	1108	2.50	3B	—	1 7/8	1 1/4	7/8	—	—	3/8	0.71
12J28TB	1210	2.80	3B	—	2 1/4	1 1/4	1	—	—	1/4	0.94
12J30TB	1210	3.00	3B	—	2 3/8	1 1/4	1	—	—	1/4	1.16
12J31TB	1210	3.15	3B	—	2 1/2	1 1/4	1	—	—	1/4	1.50
12J33TB	1210	3.35	3B	—	2 3/4	1 1/4	1	—	—	1/4	1.63
12J35TB	1610	3.55	3B	—	3	1 1/4	1	—	—	1/4	1.88
12J37TB	1610	3.75	3B	—	3 1/8	1 1/4	1	—	—	1/4	2.06
12J40TB	1610	4.00	3B	—	3 3/8	1 1/4	1	—	—	1/4	2.14
12J42TB	1610	4.20	3B	—	3 1/2	1 1/4	1	—	—	1/4	2.57
12J44TB	1610	4.40	3B	—	3 3/4	1 1/4	1	—	—	1/4	2.94
12J46TB	1610	4.65	3B	—	4	1 1/4	1	—	—	1/4	3.10
12J50TB	1610	5.00	3B	—	4 1/4	1 1/4	1	—	—	1/4	3.75
12J52TB	2012	5.20	3B	—	4 1/2	1 1/4	1 1/4	—	—	—	3.96
12J55TB	2012	5.50	3B	—	5	1 1/4	1 1/4	—	—	—	4.60
12J63TB	2012	6.30	3B	—	5 9/16	1 1/4	1 1/4	—	—	—	5.14
12J71TB	2012	7.10	6A	4 1/8	6 1/2	1 1/4	1 1/4	1/2	—	—	5.61
12J80TB	2517	8.00	6A	4 3/4	7 1/4	1 1/4	1 3/4	1/2	—	—	7.58
12J88TB	2517	8.80	5A	4 3/4	8 1/8	1 1/4	1 3/4	1/2	1/2	—	8.25
12J106TB	2517	10.60	5A	4 3/4	9 1/4	1 1/4	1 3/4	1/2	1/2	—	8.56
12J110TB	2517	11.00	5B	4 3/4	10 3/8	1 1/4	1 3/4	1/2	1/2	—	10.06
12J124TB	2517	12.40	5B	4 3/4	11 1/2	1 1/4	1 3/4	1/2	1/2	—	11.14
12J140TB	2517	14.00	5C	4 3/4	13 1/8	1 1/4	1 3/4	9/16	1/2	—	12.85
12J160TB	2517	15.80	5C	4 3/4	14 7/8	1 1/4	1 3/4	9/16	1/2	—	15.00

Shijiazhuang CAPT Power Transmission Co., Ltd.


Multi Wedged Pulleys

J16

Poly-V sheaves




1S




4







3B



5A



5B



5C

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt lbs
16J18S	—	1.77	1S	1 9/16	—	1 11/16	1 7/8	—	1/4	—	0.39
16J20S	—	2.00	1S	1 3/4	—	1 11/16	1 7/8	—	1/4	—	0.45
16J22S	—	2.24	1S	2	—	1 11/16	1 7/8	—	1/4	—	0.56
16J25TB	1108	2.50	4	—	1 7/8	1 11/16	7/8	—	13/32	13/32	0.86
16J28TB	1210	2.80	4	—	2 1/4	1 11/16	1	—	11/32	11/32	1.07
16J30TB	1210	3.00	4	—	2 3/8	1 11/16	1	—	11/32	11/32	1.33
16J31TB	1210	3.15	4	—	2 1/2	1 11/16	1	—	11/32	11/32	0.51
16J33TB	1210	3.35	4	—	2 3/4	1 11/16	1	—	11/32	11/32	1.86
16J35TB	1610	3.55	4	—	3	1 11/16	1	—	11/32	11/32	2.11
16J37TB	1610	3.75	4	—	3 1/8	1 11/16	1	—	11/32	11/32	2.14
16J40TB	1610	4.00	4	—	3 3/8	1 11/16	1	—	11/32	11/32	2.14
16J42TB	1610	4.20	4	—	3 1/2	1 11/16	1	—	11/32	11/32	2.78
16J44TB	2012	4.40	3B	—	3 3/4	1 11/16	1 1/4	—	—	7/6	3.21
16J46TB	2012	4.65	3B	—	4	1 11/16	1 1/4	—	—	7/6	3.85
16J50TB	2012	5.00	3B	—	4 1/4	1 11/16	1 1/4	—	—	7/6	4.28
16J52TB	2012	5.20	3B	—	4 1/2	1 11/16	1 1/4	—	—	7/6	4.93
16J55TB	2012	5.50	3B	—	5	1 11/16	1 1/4	—	—	7/6	5.56
16J63TB	2012	6.30	3B	—	5 9/16	1 11/16	1 1/4	—	—	7/6	7.49
16J71TB	2517	7.10	5A	4 3/4	6 1/2	1 11/16	1 3/4	1/2	1/16	—	9.42
16J80TB	2517	8.00	5A	4 3/4	7 1/4	1 11/16	1 3/4	1/2	1/16	—	10.27
16J88TB	2517	8.80	5A	4 3/4	7 1/8	1 11/16	1 3/4	1/2	1/16	—	10.61
16J106TB	2517	10.60	5A	4 3/4	9 1/4	1 11/16	1 3/4	1/2	1/16	—	10.92
16J110TB	2517	11.00	5B	4 3/4	10 3/8	1 11/16	1 3/4	1/2	1/16	—	11.35
16J124TB	2517	12.40	5B	4 3/4	11 1/2	1 11/16	1 3/4	1/2	1/16	—	12.85
16J140TB	2517	14.00	5C	4 3/4	13 1/8	1 11/16	1 3/4	9/16	1/16	—	15.20
16J160TB	2517	15.80	5C	4 3/4	14 7/8	1 11/16	1 3/4	9/16	1/16	—	18.63

Shijiazhuang CAPT Power Transmission Co., Ltd.


CAPT 凯普特传动

Multi-Wedged Pulleys


J20

Poly-V sheaves







1S




3B




4



7A



7B



7C

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs
20J18S	—	1.77	1S	1 9/16	—	2	2 5/16	—	5/16	—	0.43
20J20S	—	2.00	1S	1 3/4	—	2	2 5/16	—	5/16	—	0.56
20J22S	—	2.24	1S	2	—	2	2 5/16	—	5/16	—	0.71
20J25S	—	2.50	1S	2 3/16	—	2	2 5/16	—	5/16	—	0.88
20J28TB	1210	2.80	4	—	2 1/4	2	1	—	1/2	1/2	1.35
20J30TB	1210	3.00	4	—	2 3/8	2	1	—	1/2	1/2	1.52
20J31TB	1210	3.15	4	—	2 1/2	2	1	—	1/2	1/2	1.78
20J33TB	1210	3.35	4	—	2 3/4	2	1	—	1/2	1/2	2.14
20J35TB	1210	3.55	4	—	3	2	1	—	1/2	1/2	2.36
20J37TB	1610	3.75	4	—	3 1/8	2	1	—	1/2	1/2	2.78
20J40TB	1610	4.00	4	—	3 3/8	2	1	—	1/2	1/2	3.22
20J42TB	1610	4.20	4	—	3 1/2	2	1	—	1/2	1/2	3.64
20J44TB	2012	4.40	4	—	3 3/4	2	1 1/4	—	3/8	3/8	4.07
20J46TB	2012	4.65	4	—	4	2	1 1/4	—	3/8	3/8	4.50
20J50TB	2517	5.00	3B	—	4 1/4	2	1 3/4	—	—	1/4	5.78
20J52TB	2517	5.20	3B	—	4 1/2	2	1 3/4	—	—	1/4	6.85
20J55TB	2517	5.50	3B	—	5	2	1 3/4	—	—	1/4	9.85
20J63TB	2517	6.30	3B	—	5 9/16	2	1 3/4	—	—	1/4	10.70
20J71TB	2517	7.10	3B	—	6 1/2	2	1 3/4	—	—	1/4	11.56
20J80TB	2517	8.00	7A	4 3/4	7 1/4	2	1 3/4	1/2	—	1/4	15.42
20J88TB	3020	8.80	7A	5 3/4	8 1/8	2	2	1/2	—	0	16.71
20J100TB	3020	10.60	7A	5 3/4	9 1/4	2	2	1/2	—	0	17.77
20J110TB	3020	11.00	7B	5 3/4	10 3/8	2	2	1/2	—	0	20.35
20J124TB	3020	12.40	7B	5 3/4	11 1/2	2	2	1/2	—	0	24.44
20J140TB	3020	14.00	7C	5 3/4	13 1/8	2	2	5/8	—	0	28.27
20J160TB	3020	15.80	7C	5 3/4	14 7/8	2	2	5/8	—	0	32.76


Shijiazhuang CAPT Power Transmission Co., Ltd.

Multi Wedged Pulleys


L5

Poly-V sheaves







3A




3B



7A



5B



5C

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs
5L31TB	1210	3.15	3A	—	2 5/16	1 9/16	1	—	—	9/16	1.62
5L33TB	1210	3.35	3A	—	2 5/16	1 9/16	1	—	—	9/16	1.88
5L35TB	1610	3.55	3A	—	2 5/8	1 9/16	1	—	—	9/16	2.02
5L37TB	1610	3.75	3A	—	2 3/4	1 9/16	1	—	—	9/16	2.46
5L40TB	1610	4.00	3A	—	2 3/4	1 9/16	1	—	—	9/16	2.66
5L42TB	1610	4.20	3B	—	2 7/8	1 9/16	1	—	—	9/16	3.06
5L44TB	1610	4.40	3B	—	3 1/8	1 9/16	1	—	—	9/16	3.58
5L46TB	1610	4.65	3B	—	3 1/2	1 9/16	1	—	—	9/16	4.03
5L50TB	1610	5.00	3B	—	3 1/2	1 9/16	1	—	—	9/16	4.58
5L52TB	2012	5.20	3B	—	4 1/8	1 9/16	1 1/4	—	—	5/16	6.32
5L55TB	2012	5.50	3B	—	4 3/8	1 9/16	1 1/4	—	—	5/16	8.07
5L63TB	2012	6.30	3B	—	5	1 9/16	1 1/4	—	—	5/16	8.60
5L71TB	2012	7.10	3B	—	5 3/4	1 9/16	1 1/4	—	—	5/16	8.85
5L80TB	2012	8.00	7A	4 1/8	6 1/2	1 9/16	1 1/4	1/2	—	5/16	9.01
5L88TB	2012	8.80	7A	4 1/8	7 1/2	1 9/16	1 1/4	1/2	—	5/16	11.48
5L106TB	2012	10.60	7A	4 1/8	8 1/2	1 9/16	1 1/4	1/2	—	5/16	12.59
5L110TB	2517	11.00	5B	4 3/4	9 3/4	1 9/16	1 3/4	1/2	3/16	—	14.88
5L124TB	2517	12.40	5B	4 3/4	10 7/8	1 9/16	1 3/4	9/16	3/16	—	17.17
5L140TB	3020	14.00	5C	5 3/4	12 1/2	1 9/16	2	9/16	7/16	—	22.48
5L160TB	3020	15.80	5C	5 3/4	14 1/4	1 9/16	2	9/16	7/16	—	24.83

Bushing	Stock Bores																							
	9/16	5/8		3/4	13/16	7/8	15/16	1	1 1/8	1 3/16	1 1/4	1 3/8	1 1/2	1 9/16	1 5/8	1 3/4	1 7/8	2	2 1/4	2 3/8	2 1/2	2 3/4	3
1310	●	●	●	●	●	●	●	●	●	●	●	●											
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△								
2012			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●						
2517					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
3020								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Shijiazhuang CAPT Power Transmission Co., Ltd.


CAPT 凯普特传动

Multi Wedged Pulleys


L6

Poly-V sheaves







3A




3B



7A



5B



5C

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs
6L31TB	1210	3.15	3A	—	2 5/16	1 11/16	1	—	—	11/16	1.78
6L33TB	1210	3.35	3A	—	2 5/16	1 11/16	1	—	—	11/16	2.03
6L35TB	1610	3.55	3A	—	2 5/8	1 11/16	1	—	—	11/16	2.18
6L37TB	1610	3.75	3A	—	2 3/4	1 11/16	1	—	—	11/16	2.74
6L40TB	1610	4.00	3A	—	2 3/4	1 11/16	1	—	—	11/16	2.87
6L42TB	1610	4.20	3B	—	2 7/8	1 11/16	1	—	—	11/16	3.55
6L44TB	1610	4.40	3B	—	3 1/8	1 11/16	1	—	—	11/16	4.06
6L46TB	1610	4.65	3B	—	3 1/2	1 11/16	1	—	—	11/16	4.52
6L50TB	1610	5.00	3B	—	3 1/2	1 11/16	1	—	—	11/16	4.84
6L52TB	2012	5.20	3B	—	4 1/8	1 11/16	1 1/4	—	—	7/16	6.70
6L55TB	2012	5.50	3B	—	4 3/8	1 11/16	1 1/4	—	—	7/16	7.82
6L63TB	2012	6.30	3B	—	5	1 11/16	1 1/4	—	—	7/16	9.02
6L71TB	2012	7.10	3B	—	5 3/4	1 11/16	1 1/4	—	—	7/16	9.25
6L80TB	2012	8.00	7A	4 1/8	6 1/2	1 11/16	1 1/4	9/16	—	7/16	9.44
6L88TB	2012	8.80	7A	4 1/8	7 1/2	1 11/16	1 1/4	9/16	—	7/16	12.10
6L106TB	2012	10.60	7A	4 1/8	8 1/2	1 11/16	1 1/4	9/16	—	7/16	13.16
6L110TB	2517	11.00	5B	4 3/4	9 3/4	1 11/16	1 3/4	9/16	1/16	—	16.48
6L124TB	2517	12.40	5B	4 3/4	10 7/8	1 11/16	1 3/4	5/8	1/16	—	17.86
6L140TB	3020	14.00	5C	5 3/4	12 1/2	1 11/16	2	5/8	5/16	—	22.61
6L160TB	3020	15.80	5C	5 3/4	14 1/4	1 11/16	2	5/8	5/16	—	25.69

Bushing	Stock Bores																						
	9/16	5/8		3/4	13/16	7/8	15/16	1	1 1/8	1 3/16	1 1/4	1 3/8	1 1/2	1 9/16	1 5/8	1 3/4	1 7/8	2	2 1/4	2 3/8	2 1/2	2 3/4	3
1310	●	●	●	●	●	●	●	●	●	●	●	●											
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△								
2012			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
2517					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
3020								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


Shijiazhuang CAPT Power Transmission Co., Ltd.

Multi-Wedged Pulleys


L8

Poly-V sheaves







3A




3B




4



7A



5B



5C


PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	kg
8L30TB	1108	3.05	3A	—	1 7/8	2 1/16	7/8	—	—	1 3/16	1.37
8L31TB	1210	3.15	3A	—	2 5/16	2 1/16	1	—	—	1 1/16	1.44
8L33TB	1210	3.35	3A	—	2 5/16	2 1/16	1	—	—	1 1/16	1.65
8L35TB	1610	3.55	3A	—	2 5/8	2 1/16	1	—	—	1 1/16	2.14
8L37TB	1610	3.75	3A	—	2 3/4	2 1/16	1	—	—	1 1/16	2.78
8L40TB	1610	4.00	3A	—	2 3/4	2 1/16	1	—	—	1 1/16	2.36
8L42TB	1610	4.20	4	—	2 7/8	2 1/16	1	—	17/32	17/32	2.57
8L44TB	2012	4.40	4	—	3 1/8	2 1/16	1 1/4	—	13/32	13/32	2.57
8L46TB	2012	4.65	4	—	3 1/2	2 1/16	1 1/4	—	13/32	13/32	3.26
8L50TB	2012	5.00	4	—	3 1/2	2 1/16	1 1/4	—	13/32	13/32	3.85
8L52TB	2012	5.20	4	—	4 1/8	2 1/16	1 1/4	—	13/32	13/32	4.29
8L55TB	2012	5.50	4	—	4 3/8	2 1/16	1 1/4	—	13/32	13/32	5.35
8L63TB	2012	6.30	4	—	5	2 1/16	1 1/4	—	13/32	13/32	6.21
8L71TB	2517	7.10	3B	—	5 3/4	2 1/16	1 3/4	—	—	5/16	8.78
8L80TB	2517	8.00	3B	—	6 1/2	2 1/16	1 3/4	—	—	5/16	10.06
8L88TB	2517	8.80	7A	4 3/4	7 1/2	2 1/16	1 3/4	1/2	—	5/16	10.93
8L106TB	2517	10.60	7A	4 3/4	8 1/2	2 1/16	1 3/4	1/2	—	5/16	13.92
8L110TB	3020	11.00	7B	5 3/4	9 3/4	2 1/16	2	9/16	1/16	—	14.15
8L124TB	3020	12.40	7B	5 3/4	10 7/8	2 1/16	2	9/16	1/16	—	14.65
8L140TB	3020	14.00	7C	5 3/4	12 1/2	2 1/16	2	9/16	1/16	—	17.13
8L160TB	3525	15.80	5C	6 5/8	14 1/4	2 1/16	2 1/2	5/8	7/16	—	19.70
8L180TB	3525	17.80	5C	6 5/8	16 1/8	2 1/16	2 1/2	13/16	7/16	—	26.98
8L200TB	4030	19.80	5C	8 1/2	18 1/8	2 1/16	3	13/16	15/16	—	27.84
8L220TB	4030	22.00	5C	8 1/2	20 1/2	2 1/16	3	13/16	15/16	—	34.26
8L250TB	4030	24.80	5C	8 1/2	23 1/4	2 1/16	3	13/16	15/16	—	37.70

Shijiazhuang CAPT Power Transmission Co., Ltd.


Multi Wedged Pulleys

L10


Poly-V sheaves




3A




3B




4




7A



7B



7C

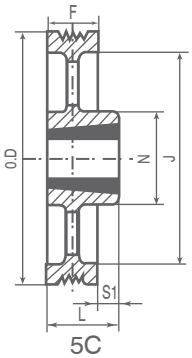

5C


PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	kg
10L30TB	1108	3.05	3A	—	1 7/8	2 7/16	7/8	—	—	1 9/16	1.38
10L31TB	1210	3.15	3A	—	2 5/16	2 7/16	1	—	—	1 7/16	1.51
10L33TB	1210	3.35	3A	—	2 5/16	2 7/16	1	—	—	1 7/16	1.54
10L35TB	1615	3.55	3A	—	2 5/8	2 7/16	1 1/2	—	—	15/16	1.66
10L37TB	1615	3.75	3A	—	2 3/4	2 7/16	1 1/2	—	—	15/16	1.79
10L40TB	1615	4.00	3A	—	2 3/4	2 7/16	1 1/2	—	—	15/16	1.92
10L42TB	1615	4.20	4	—	2 7/8	2 7/16	1 1/2	—	15/32	15/32	2.15
10L44TB	2012	4.40	4	—	3 1/8	2 7/16	1 1/4	—	19/32	19/32	2.38
10L46TB	2012	4.65	4	—	3 1/2	2 7/16	1 1/4	—	19/32	19/32	2.58
10L50TB	2012	5.00	4	—	3 1/2	2 7/16	1 1/4	—	19/32	19/32	2.25
10L52TB	2012	5.20	4	—	4 1/8	2 7/16	1 1/4	—	19/32	19/32	3.18
10L55TB	2012	5.50	4	—	4 3/8	2 7/16	1 1/4	—	19/32	19/32	3.95
10L63TB	2012	6.30	4	—	5	2 7/16	1 1/4	—	19/32	19/32	4.84
10L71TB	2517	7.10	3B	—	5 3/4	2 7/16	1 3/4	—	—	11/16	6.95
10L80TB	2517	8.00	3B	—	6 1/2	2 7/16	1 3/4	—	—	11/16	9.22
10L88TB	2517	8.80	7A	4 3/4	7 1/2	2 7/16	1 3/4	1/2	—	11/16	7.16
10L106TB	2517	10.60	7A	4 3/4	8 1/2	2 7/16	1 3/4	1/2	—	11/16	7.75
10L110TB	3020	11.00	7B	5 3/4	9 3/4	2 7/16	2	9/16	—	7/16	9.8
10L124TB	3020	12.40	7B	5 3/4	10 7/8	2 7/16	2	9/16	—	7/16	11.7
10L140TB	3020	14.00	7C	5 3/4	12 1/2	2 7/16	2	5/8	—	7/16	15.2
10L160TB	3525	15.80	5C	6 5/8	14 1/4	2 7/16	2 1/2	5/8	1/16	—	16.3
10L180TB	3525	17.80	5C	6 5/8	16 1/8	2 7/16	2 1/2	13/16	1/16	—	21.5
10L200TB	4030	19.80	5C	8 1/2	18 1/8	2 7/16	3	13/16	9/16	—	25.8
10L220TB	4030	22.00	5C	8 1/2	20 1/2	2 7/16	3	7/8	9/16	—	28.8
10L250TB	4030	24.80	5C	8 1/2	23 1/4	2 7/16	3	7/8	9/16	—	32.9

Shijiazhuang CAPT Power Transmission Co., Ltd.

Multi-Wedged Pulleys

L12


Poly-V sheaves

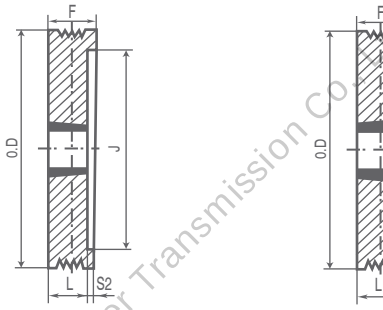


3A

3B







4



5A



5B



5C

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs
12L30TB	1108	3.05	3A	—	1 7/8	2 3/4	7/8	—	—	1 7/8	2.14
12L31TB	1310	3.15	3A	—	2 5/16	2 3/4	1	—	—	1 3/4	2.46
12L33TB	1310	3.35	3A	—	2 5/16	2 3/4	1	—	—	1 3/4	2.53
12L35TB	1615	3.55	3A	—	2 5/8	2 3/4	1 1/2	—	—	1 1/4	2.78
12L37TB	1615	3.75	3A	—	2 3/4	2 3/4	1 1/2	—	—	1 1/4	3.32
12L40TB	1615	4.00	3A	—	2 3/4	2 3/4	1 1/2	—	—	1 1/4	3.00
12L42TB	1615	4.20	3A	—	2 7/8	2 3/4	1 1/2	—	—	1 1/4	3.86
12L44TB	2012	4.40	4	—	3 1/8	2 3/4	1 1/4	—	3/4	3/4	4.43
12L46TB	2012	4.65	4	—	3 1/2	2 3/4	1 1/4	—	3/4	3/4	4.93
12L50TB	2012	5.00	4	—	3 1/2	2 3/4	1 1/4	—	3/4	3/4	5.35
12L52TB	2517	5.20	4	—	4 1/8	2 3/4	1 3/4	—	1/2	1/2	6.00
12L55TB	2517	5.50	4	—	4 3/8	2 3/4	1 3/4	—	1/2	1/2	7.28
12L63TB	2517	6.30	4	—	5	2 3/4	1 3/4	—	1/2	1/2	10.50
12L71TB	2517	7.10	4	—	5 3/4	2 3/4	1 3/4	—	1/2	1/2	13.27
12L80TB	2517	8.00	4	—	6 1/2	2 3/4	1 3/4	—	1/2	1/2	13.92
12L88TB	3030	8.80	5A	5	7 1/2	2 3/4	3	9/16	1/4	—	16.06
12L106TB	3030	10.60	5A	5	8 1/2	2 3/4	3	9/16	1/4	—	17.14
12L110TB	3030	11.00	5B	5 3/4	9 3/4	2 3/4	3	5/8	1/4	—	18.85
12L124TB	3030	12.40	5B	5 3/4	10 7/8	2 3/4	3	5/8	1/4	—	23.12
12L140TB	3535	14.00	5C	6 5/8	12 1/2	2 3/4	3 1/2	13/16	3/4	—	27.20
12L160TB	3535	15.80	5C	6 5/8	14 1/4	2 3/4	3 1/2	13/16	3/4	—	28.47
12L180TB	3535	17.80	5C	6 5/8	16 1/8	2 3/4	3 1/2	7/8	3/4	—	40.68
12L200TB	4030	19.80	5C	8 1/2	18 1/8	2 3/4	3	7/8	1/4	—	42.83
12L220TB	4030	22.00	5C	8 1/2	20 1/2	2 3/4	3	1	1/4	—	53.53
12L250TB	4030	24.80	5C	8 1/2	23 1/4	2 3/4	3	1	1/4	—	64.25

Shijiazhuang CAPT Power Transmission Co., Ltd.


CAPT 凯普特传动

Multi Wedged Pulleys


L16

Poly-V sheaves







4




7B




7C

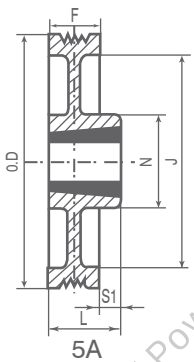

5A

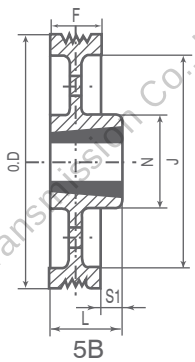

5B

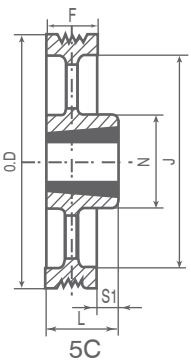

5C

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	kg
16L33TB	1615	3.35	4	—	2 5/8	3 1/2	1 1/2	—	1	1	2.57
16L35TB	1615	3.55	4	—	2 5/8	3 1/2	1 1/2	—	1	1	3.42
16L37TB	1615	3.75	4	—	2 3/4	3 1/2	1 1/2	—	1	1	3.64
16L40TB	1615	4.00	4	—	2 3/4	3 1/2	1 1/2	—	1	1	3.85
16L42TB	1615	4.20	4	—	2 7/8	3 1/2	1 1/2	—	1	1	4.93
16L44TB	2012	4.40	4	—	3 1/8	3 1/2	1 1/4	—	1 1/8	1 1/8	5.35
16L46TB	2012	4.65	4	—	3 1/2	3 1/2	1 1/4	—	1 1/8	1 1/8	5.56
16L50TB	2012	5.00	4	—	3 1/2	3 1/2	1 1/4	—	1 1/8	1 1/8	6.00
16L52TB	2517	5.20	4	—	4 1/8	3 1/2	1 3/4	—	7/8	7/8	6.85
16L55TB	2517	5.50	4	—	4 3/8	3 1/2	1 3/4	—	7/8	7/8	7.78
16L63TB	2517	6.30	4	—	5	3 1/2	1 3/4	—	7/8	7/8	11.78
16L71TB	2517	7.10	4	—	5 3/4	3 1/2	1 3/4	—	7/8	7/8	15.85
16L80TB	2517	8.00	4	—	6 1/2	3 1/2	1 3/4	—	7/8	7/8	20.12
16L88TB	3030	8.80	7B	5 3/4	7 1/2	3 1/2	3	13/16	1/2	—	22.91
16L106TB	3030	10.60	7B	5 3/4	8 1/2	3 1/2	3	13/16	1/2	—	25.60
16L110TB	3030	11.00	7B	5 3/4	9 3/4	3 1/2	3	7/8	1/2	—	26.12
16L124TB	3535	12.40	7B	6 5/8	10 7/8	3 1/2	3 1/2	7/8	0	0	29.55
16L140TB	3535	14.00	7C	6 5/8	12 1/2	3 1/2	3 1/2	1	0	0	35.80
16L160TB	3535	15.80	7C	6 5/8	14 1/4	3 1/2	3 1/2	1	0	0	41.11
16L180TB	4040	17.80	5C	8 1/2	16 1/8	3 1/2	4	1	1/2	—	47.11
16L200TB	4040	19.80	5C	8 1/2	18 1/8	3 1/2	4	1 1/8	1/2	—	60.38
16L220TB	4040	22.00	5C	8 1/2	20 1/2	3 1/2	4	1 1/8	1/2	—	66.30
16L250TB	4040	24.80	5C	8 1/2	23 1/4	3 1/2	4	1 1/8	1/2	—	75.68

Shijiazhuang CAPT Power Transmission Co., Ltd.


CAPT 凯普特传动

Multi Wedged **Pulleys**


L20

Poly-V sheaves







4



7A



7B



7C

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs
20L52TB	2517	5.20	4	—	4 1/8	4 1/4	1 3/4	—	1 1/4	1 1/4	8.56
20L55TB	2517	5.50	4	—	4 3/8	4 1/4	1 3/4	—	1 1/4	1 1/4	9.42
20L63TB	2517	6.30	4	—	5	4 1/4	1 3/4	—	1 1/4	1 1/4	12.41
20L71TB	2517	7.10	4	—	5 3/4	4 1/4	1 3/4	—	1 1/4	1 1/4	17.13
20L80TB	3030	8.00	4	—	6 1/2	4 1/4	3	—	1 1/4	1 1/4	23.55
20L88TB	3030	8.80	7A	5 3/4	7 1/2	4 1/4	3	13/16	5/8	5/8	32.98
20L106TB	3030	10.60	7A	5 3/4	8 1/2	4 1/4	3	13/16	5/8	5/8	44.96
20L110TB	3535	11.00	7B	6 5/8	9 3/4	4 1/4	3 1/2	7/8	—	3/4	48.80
20L124TB	3535	12.40	7B	6 5/8	10 7/8	4 1/4	3 1/2	7/8	—	3/4	54.82
20L140TB	3535	14.00	7C	6 5/8	12 1/2	4 1/4	3 1/2	1 1/8	—	3/4	60.38
20L160TB	4040	15.80	7C	8 1/2	14 1/4	4 1/4	4	1 1/8	—	1/4	63.81
20L180TB	4040	17.80	7C	8 1/2	16 1/8	4 1/4	4	1 3/16	—	1/4	76.23
20L200TB	4040	19.80	7C	8 1/2	18 1/8	4 1/4	4	1 3/16	—	1/4	80.50
20L220TB	4040	22.00	7C	8 1/2	20 1/2	4 1/4	4	1 3/16	—	1/4	100.60
20L250TB	4040	24.80	7C	8 1/2	23 1/4	4 1/4	4	1 3/16	—	1/4	113.50


Shijiazhuang CAPT Power Transmission Co., Ltd.

Multi-Wedged Pulleys


M6

Poly-V sheaves




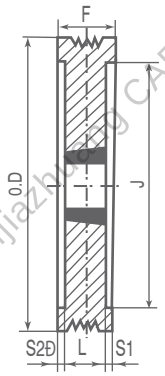


4

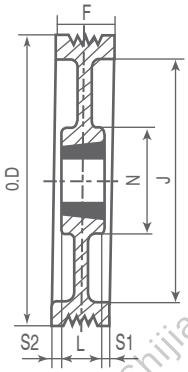

7A

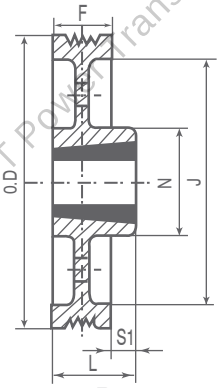

5B

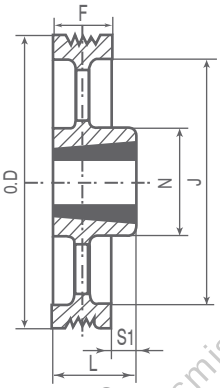

5C

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs
6M71TB	2517	7.10	4	—	5 1/8	2 15/16	1 3/4	—	19/32	19/32	14.56
6M75TB	2517	7.50	4	—	5 1/2	2 15/16	1 3/4	—	19/32	19/32	15.85
6M80TB	3020	8.00	4	—	6 5/16	2 15/16	2	—	15/32	15/32	16.27
6M84TB	3020	8.40	4	—	6 11/16	2 15/16	2	—	15/32	15/32	16.92
6M88TB	3020	8.80	4	—	7 1/8	2 15/16	2	—	15/32	15/32	17.98
6M106TB	3020	10.60	7A	5 3/4	8 1/16	2 15/16	2	7/8	15/32	15/32	19.28
6M110TB	3020	11.00	7A	5 3/4	9	2 15/16	2	7/8	15/32	15/32	21.41
6M124TB	3535	12.40	5B	6 5/8	10 3/4	2 15/16	3 1/2	1	9/16	—	25.27
6M140TB	3535	14.00	5B	6 5/8	12	2 15/16	3 1/2	1	9/16	—	37.68
6M160TB	4040	15.80	5C	8 1/2	13 3/4	2 15/16	4	1 1/8	1 1/16	—	43.25
6M180TB	4040	17.80	5C	8 1/2	15 3/4	2 15/16	4	1 3/16	1 1/16		49.46
6M200TB	4040	19.80	5C	8 1/2	17 3/4	2 15/16	4	1 3/16	1 1/16	—	55.45
6M220TB	4040	22.00	5C	8 1/2	20	2 15/16	4	1 3/16	1 1/16	—	62.75
6M250TB	4040	24.80	5C	8 1/2	26	2 15/16	4	1 3/16	1 1/16	—	94.22

Shijiazhuang CAPT Power Transmission Co., Ltd.


CAPT 凯普特传动

Multi Wedged Pulleys


M10

Poly-V sheaves




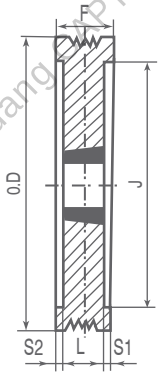


4

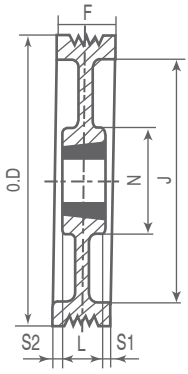


7A

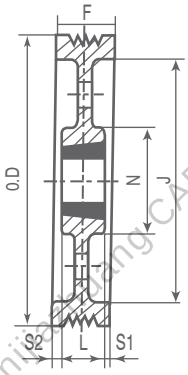

7B

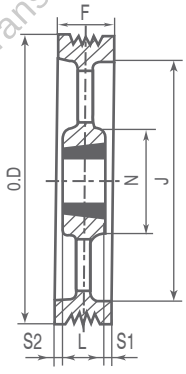

7C

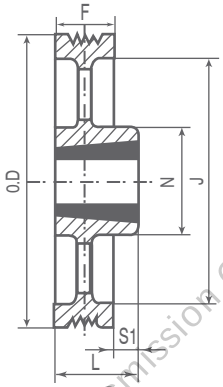

5C


PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	wt Lbs
10M71TB	3030	7.10	4	—	5 1/8	4 7/16	3	—	23/32	23/32	19.28
10M75TB	3030	7.50	4	—	5 1/2	4 7/16	3	—	23/32	23/32	22.48
10M80TB	3030	8.00	4	—	6	4 7/16	3	—	23/32	23/32	23.55
10M84TB	3535	8.40	4	—	6 1/2	4 7/16	3 1/2	—	15/32	15/32	34.48
10M88TB	3535	8.80	4	—	7	4 7/16	3 1/2	—	15/32	15/32	36.62
10M106TB	3535	10.60	4	—	8	4 7/16	3 1/2	—	15/32	15/32	40.68
10M110TB	3535	11.00	7A	6 5/8	9 1/8	4 7/16	3 1/2	1 1/8	15/32	15/32	45.60
10M124TB	3535	12.40	7B	6 5/8	10 1/2	4 7/16	3 1/2	1 1/8	15/32	15/32	55.67
10M140TB	4040	14.00	7B	8 1/2	12	4 7/16	4	1 1/8	—	7/16	62.51
10M160TB	4040	15.80	7C	8 1/2	13 3/4	4 7/16	4	1 3/8	—	7/16	70.45
10M180TB	4040	17.80	7C	8 1/2	15 3/4	4 7/16	4	1 3/8	—	7/16	79.44
10M200TB	4040	19.80	7C	8 1/2	17 3/4	4 7/16	4	1 3/8	—	7/16	88.00
10M220TB	4545	22.00	5C	10	20	4 7/16	4 1/2	1 9/16	1/16	—	119.90
10M250TB	4545	24.80	5C	10	22 7/8	4 7/16	4 1/2	1 9/16	1/16	—	134.90
10M280TB	4545	28.00	5C	10	26	4 7/16	4 1/2	1 9/16	1/16	—	152.00

Shijiazhuang CAPT Power Transmission Co., Ltd.


Multi Wedged Pulleys

M16


Poly-V sheaves

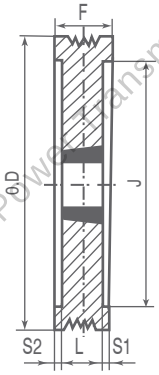

4

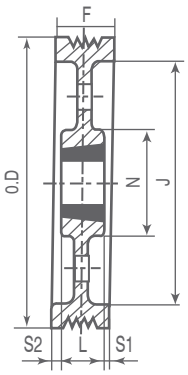

7B

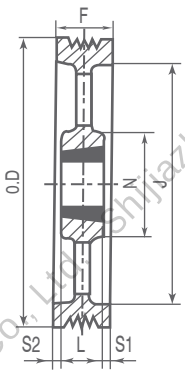

7C

PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	kg
16M71TB	3030	7.10	4	—	5 1/8	6 5/8	3	—	1 13/16	1 13/16	19.27
16M75TB	3030	7.50	4	—	5 1/2	6 5/8	3	—	1 13/16	1 13/16	21.84
16M80TB	3535	8.00	4	—	6	6 5/8	3 1/2	—	1 9/16	1 9/16	27.83
16M84TB	3535	8.40	4	—	6 1/2	6 5/8	3 1/2	—	1 9/16	1 9/16	35.98
16M88TB	3535	8.80	4	—	7	6 5/8	3 1/2	—	1 9/16	1 9/16	38.11
16M106TB	3535	10.60	4	—	7 1/2	6 5/8	3 1/2	—	1 9/16	1 9/16	53.53
16M110TB	3535	11.00	4	—	9 1/8	6 5/8	3 1/2	—	1 9/16	1 9/16	69.38
16M124TB	4040	12.40	4	—	10 1/2	6 5/8	4	—	1 5/16	1 5/16	91.22
16M140TB	4040	14.00	7B	8 1/2	12	6 5/8	4	1 3/8	1 5/16	1 5/16	100.60
16M160TB	4040	15.80	7B	8 1/2	13 3/4	6 5/8	4	1 3/8	1 5/16	1 5/16	110.40
16M180TB	4040	17.80	7C	8 1/2	15 3/4	6 5/8	4	1 3/4	1 5/16	1 5/16	121.00
16M200TB	4040	19.80	7C	8 1/2	17 3/4	6 5/8	4	2 3/16	1 5/16	1 5/16	133.40
16M220TB	4545	22.00	7C	10	20	6 5/8	4 1/2	2 3/16	1 1/16	1 1/16	154.18
16M250TB	4545	24.80	7C	10	23 7/8	6 5/8	4 1/2	2 3/8	1 1/16	1 1/16	173.40
16M280TB	4545	28.00	7C	10	26	6 5/8	4 1/2	2 3/8	1 1/16	1 1/16	195.50

Standard bore dimensions of BTL bushings


Bushing	Stock Bores																							
	1	1 1/8	1 3/16	1 1/4	1 7/16	1 1/2	1 11/16			1 5/8	1 3/4	1 15/16	2	2 1/4	2 3/8	2 1/2	2 3/4	3	3 1/4	3 3/8	3 1/2	3 3/4	4	4 1/4	4 3/8
3030	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
3535					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
4040							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
4545														●	●	●	●	●	●	●	●	●	●	●	●

Shijiazhuang CAPT Power Transmission Co., Ltd.


Multi Wedged Pulleys

M20


Poly-V sheaves

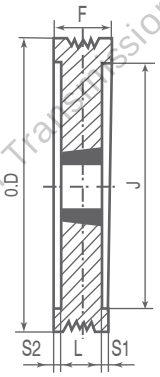

4

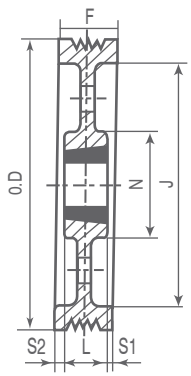

7B

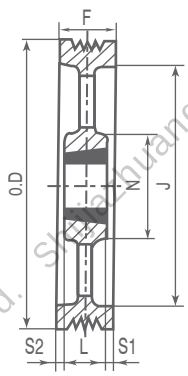

7C


PART NO.	Bushing	O.D	TYPE	N	J	F	L	E	S_1	S_2	kg
20M71TB	3030	7.10	4		5 1/8	8 1/16	3		2 17/32	2 17/32	21.84
20M75TB	3030	7.50	4		5 1/2	8 1/16	3		2 17/32	2 17/32	24.62
20M80TB	3535	8.00	4		6	8 1/16	3 1/2		2 9/32	2 9/32	27.82
20M84TB	3535	8.40	4		6 1/2	8 1/16	3 1/2		2 9/32	2 9/32	33.20
20M88TB	3535	8.80	4		7	8 1/16	3 1/2		2 9/32	2 9/32	42.18
20M106TB	3535	10.60	4		7 1/2	8 1/16	3 1/2		2 9/32	2 9/32	61.24
20M110TB	3535	11.00	4		9 1/8	8 1/16	3 1/2		2 9/32	2 9/32	84.88
20M124TB	4040	12.40	4		10 1/2	8 1/16	4		2 1/32	2 1/32	89.90
20M160TB	4040	15.80	7B	8 1/2	13 3/4	8 1/16	4	1 9/16	2 1/32	2 1/32	122.50
20M180TB	4040	17.80	7C	8 1/2	15 3/4	8 1/16	4	2	2 1/32	2 1/32	125.90
20M200TB	4545	19.80	7C	10	17 3/4	8 1/16	4 1/2	2 3/8	1 25/32	1 25/32	139.60
20M220TB	4545	22.00	7C	10	20	8 1/16	4 1/2	2 3/8	1 25/32	1 25/32	156.30
20M250TB	4545	24.80	7C	10	20 7/8	8 1/16	4 1/2	2 9/16	1 25/32	1 25/32	175.50
20M280TB	5050	28.00	7C	10 1/2	26	8 1/16	5	2 9/16	1 17/32	1 17/32	210.70

Standard bore dimensions of BTL bushings


Bushing	Stock Bores																										
	1	1 1/8	1 3/16	1 1/4	1 7/16	1 1/2	1 11/16			1 5/8	1 3/4	1 15/16	2	2 1/4	2 3/8	2 1/2	2 3/4	3	3 1/4	3 3/8	3 1/2	3 3/4	4	4 1/4	4 3/8	4 1/2	4 3/4	5
3030	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
3535					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●						
4040							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
4545													●	●	●	●	●	●	●	●	●	●	●	●	●		
5050														●	●	●	●	●	●	●	●	●	●	●	●	●	●

Shijiazhuang CAPT Power Transmission Co., Ltd.


Taper Bore Poly-V Sheaves STL




TYPE 1




TYPE 2




TYPE 3




TYPE 4




TYPE 5




TYPE 2B




TYPE 3B




TYPE 5B




TYPE 6




TYPE 7




TYPE 8




TYPE 9




TYPE 6W




TYPE 7A




TYPE 4A



TYPE 5A



TYPE 4S




TYPE 3S


J–L–M

Covss Section		No.of Grooves	Pitch Diameter	Bore Range*	Belt Pitch Lengths
J	3/32"Rib Spacing	4,6	1.25-1.90"	FB3/8-1"	18.0-98.0"
		4,6 10,16	2.00-10.60	3/8-2 11/16	
L	3/8"Rib Spacing	6,8,10,12 14,16,20	3.00-30.00	1/2-3 3/4	50.0-145.5
M	3/8"Rib Spacing	6,8,10,12, 14,16,20	7.00-44.00	3/4-4 1/4	90.0-198.0


"FB=Finished Bore. Others are bushing type.



TYPE 4W




TYPE 10




TYPE 2A

Shijiazhuang CAPT Power Transmission Co., Ltd.


Taper Bore Poly-V Sheaves STL




TYPE 3




TYPE 4




TYPE 5




TYPE 6




TYPE 7



TYPE 10



TYPE 2A



J6 Specifications--Stock "J" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
6J20G	2.00	2.00	G	3	—	1 7/8	1 1/4	1	7/16	11/16	2	—	—	3/16	0.8
6J21G	2.12	2.12	G	4	—	1 3/8	3/4	1	7/16	3/16	2	—	—	3/16	0.7
6J22G	2.24	2.24	G	4	—	1 3/8	3/4	1	7/16	3/16	2	—	—	3/16	0.8
6J23G	2.36	2.36	G	4	—	1 3/8	3/4	1	7/16	3/16	2	—	—	3/16	0.9
6J25G	2.50	2.50	G	6	2 1/16	1 1/4	3/4	1	5/16	1/16	2	7/16	5/8	3/16	0.7
6J26G	2.65	2.65	G	6	2 1/8	1 1/4	3/4	1	5/16	1/16	2	7/16	5/8	3/16	0.8
6J28G	2.80	2.80	G	6	2 1/4	1 1/4	3/4	1	5/16	1/16	2	7/16	5/8	3/16	0.9
6J30H	3.00	3.00	H	5	—	1 1/2	3/4	1 1/4	9/16	1/16	2 1/2	7/16	7/8	3/16	1.2
6J31H	3.15	3.15	H	5	—	1 1/2	3/4	1 1/4	9/16	1/16	2 1/2	7/16	7/8	3/16	1.9
6J33H	3.35	3.35	H	5	—	1 1/2	3/4	1 1/4	9/16	1/16	2 1/2	7/16	7/8	3/16	2.1
6J45P	4.50	4.50	P_1	7	—	2 3/16	3/4	1 15/16	1 3/16	—	3	5/8	1 5/16	1/4	3.1
6J60P	6.00	6.00	P_1	10	5 1/4	2 3/16	3/4	1 15/16	29/32	9/32	3	5/8	1 5/16	1/4	4.7
6J80P	8.00	8.00	P_1	10	7	2 3/16	3/4	1 15/16	29/32	9/32	3	5/8	1 5/16	1/4	6.6
6J106P	10.60	10.60	P_1	2A	9 7/16	2 3/16	3/4	1 15/16	29/32	9/32	3	5/8	1 5/16	1/4	9.3
6J140Q	14.00	14.00	Q_1	2A	12 3/16	2 25/32	3/4	2 1/2	1 1/4	1/2	4 1/8	3/4	1 3/4	9/32	13.6
6J190Q	19.00	19.00	Q_1	2A	18 1/4	2 25/32	3/4	2 1/2	1 1/4	1/2	4 1/8	3/4	1 3/4	9/32	19.8

STL Bore Range


Bushing	Bore Range
G	3/8"-1"
H	3/8-1 1/2
P_1	1/2-1 3/4
Q_1	3/4-2 11/16

Standard Keyseats


Bore Range	Keyseat	Bore Range	Keyseat
3/8" & 7/16"	None	1 5/16" & 1 3/8"	5/16" x 5/32"
1/2 & 9/16	1/8" x 1/16"	1 7/16-1 3/4	3/8 x 3/16
5/8-7/8	3/16 x 3/32	1 13/16-2 1/4	1/2 x 1/4
15/16-1 1/4	1/4 x 1/8	2 5/16-2 11/16	5/8 x 5/16

1 3/8" Bore Bushings also available with 3/8"x3/16" Keyseat.


Taper Bore Poly-V Sheaves STL




TYPE 3




TYPE 4




TYPE 6




TYPE 7



TYPE 10



TYPE 2A



J10 Specifications--Stock "J" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
10J20G	2.00	2.00	G	3	—	2 1/4	1 5/8	1	7/16	1 1/16	2	—	—	3/16	1.0
10J21G	2.12	2.12	G	4	—	1 3/4	1 1/8	1	7/16	9/16	2	—	—	3/16	0.8
10J22G	2.24	2.24	G	4	—	1 3/4	1 1/8	1	7/16	9/16	2	—	—	3/16	0.9
10J23G	2.36	2.36	G	4	—	1 3/4	1 1/8	1	7/16	9/16	2	—	—	3/16	1.0
10J25G	2.50	2.50	G	6	2 1/16	1 5/16	1 1/8	1	—	1/8	2	7/16	11/16	3/16	0.9
10J26G	2.65	2.65	G	6	2 1/8	1 5/16	1 1/8	1	—	1/8	2	7/16	11/16	3/16	1.1
10J28G	2.80	2.80	G	6	2 1/4	1 5/16	1 1/8	1	—	1/8	2	7/16	11/16	3/16	1.3
10J30H	3.00	3.00	H	6	2 9/16	1 1/2	1 1/8	1 1/4	3/16	1/16	2 1/2	7/16	7/8	3/16	1.5
10J31H	3.15	3.15	H	6	2 5/8	1 1/2	1 1/8	1 1/4	3/16	1/16	2 1/2	7/16	7/8	3/16	1.6
10J33P	3.35	3.35	P1	7	—	2 3/16	1 1/8	1 15/16	13/16	—	3	5/8	1 5/16	1/4	1.9
10J45P	4.50	4.50	P1	7	—	2 3/16	1 1/8	1 15/16	13/16	—	3	5/8	1 5/16	1/4	4.0
10J60P	6.00	6.00	P1	10	5 1/4	2 3/16	1 1/8	1 15/16	23/32	3/32	3	5/8	1 5/16	1/4	5.4
10J80P	8.00	8.00	P1	10	7	2 3/16	1 1/8	1 15/16	23/32	3/32	3	5/8	1 5/16	1/4	11.8
10J106Q	10.60	10.60	Q1	2A	9 7/16	2 25/32	1 1/8	2 1/2	1 1/16	5/16	4 1/8	3/4	1 3/4	9/32	13.1
10J140Q	14.00	14.00	Q1	2A	12 3/16	2 25/32	1 1/8	2 1/2	1 1/16	5/16	4 1/8	3/4	1 3/4	9/32	16.8
10J190Q	19.00	19.00	Q1	2A	18 1/4	2 25/32	1 1/8	2 1/2	1 1/16	5/16	4 1/8	3/4	1 3/4	9/32	22.0

STL Bore Range


Bushing	Bore Range
G	3/8"-1"
H	3/8-1 1/2
P1	1/2-1 3/4
Q1	3/4-2 11/16

Standard Keyseats


Bore Range	Keyseat	Bore Range	Keyseat
3/8" & 7/16"	None	1 5/16" & 1 3/8"	5/16" x 5/32"
1/2 & 9/16	1/8" x 1/16"	1 7/16-1 3/4	3/8 x 3/16
5/8-7/8	3/16 x 3/32	1 13/16-2 1/4	1/2 x 1/4
15/16-1 1/4	1/4 x 1/8	2 5/16-2 11/16	5/8 x 5/16

1 3/8" Bore Bushings also available with 3/8"x3/16" Keyseat.


Taper Bore Poly-V Sheaves STL




TYPE 6




TYPE 8



TYPE 9



TYPE 3S



TYPE 2A



J16 Specifications--Stock "J" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
16J25G	2.50	2.50	G	6	2 1/16	1 27/32	1 21/32	1	—	21/32	2	7/16	1 7/32	3/16	1.5
16J26G	2.65	2.65	G	6	2 1/8	1 27/32	1 21/32	1	—	21/32	2	7/16	1 7/32	3/16	1.8
16J28G	2.80	2.80	G	6	2 1/4	1 27/32	1 21/32	1	—	21/32	2	7/16	1 7/32	3/16	2.0
16J30H	3.00	3.00	H	6	2 9/16	1 27/32	1 21/32	1 1/4	—	13/32	2 1/2	7/16	1 7/32	3/16	2.1
16J31H	3.15	3.15	H	6	2 5/8	1 27/32	1 21/32	1 1/4	—	13/32	2 1/2	7/16	1 7/32	3/16	2.3
16J33P	3.35	3.35	P_1	8	2 13/16	2 17/32	1 21/32	1 15/16	5/8	11/32	3	—	1 5/16	1/4	2.5
16J45P	4.50	4.50	P_1	9	3 3/4	2 3/16	1 21/32	1 15/16	9/32	—	3	5/8	1 5/16	1/4	5.2
16J60P	6.00	6.00	P_1	3S	5 1/4	2 23/64	1 21/32	1 15/16	29/64	11/64	3	5/8	1 5/16	1/4	6.7
16J80Q	8.00	8.00	Q_1	2A	7	2 25/32	1 21/32	2 1/2	51/64	3/64	4 1/8	3/4	1 3/4	9/32	13.5
16J106Q	10.60	10.60	Q_1	2A	9 7/16	2 25/32	1 21/32	2 1/2	51/64	3/64	4 1/8	3/4	1 3/4	9/32	15.4
16J140Q	14.00	14.00	Q_1	2A	12 3/16	2 25/32	1 21/32	2 1/2	51/64	3/64	4 1/8	3/4	1 3/4	9/32	18.7
16J190Q	19.00	19.00	Q_1	2A	18 1/4	2 25/32	1 21/32	2 1/2	51/64	3/64	4 1/8	3/4	1 3/4	9/32	27.4

STL Bore Range


Bushing	Bore Range
G	3/8"-1"
H	3/8-1 1/2
P_1	1/2-1 3/4
Q_1	3/4-2 11/16


Standard Keyseats


Bore Range	Keyseat	Bore Range	Keyseat
3/8" & 7/16"	None	1 5/16" & 1 3/8"	5/16" x 5/32"
1/2 & 9/16	1/8" x 1/16"	1 7/16-1 3/4	3/8 x 3/16
5/8-7/8	3/16 x 3/32	1 13/16-2 1/4	1/2 x 1/4
15/16-1 1/4	1/4 x 1/8	2 5/16-2 11/16	5/8 x 5/16


1 3/8" Bore Bushings also available with 3/8"x3/16" Keyseat.


Taper Bore Poly-V Sheaves STL


TYPE 2B


TYPE 5B


TYPE 4S


TYPE 4W


TYPE 7A

L6 Specifications--Stock "L" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
6L30P	3.00	3.00	P1	2B	-	3 1/8	1 11/16	1 15/16	1 3/16	15/16	3	5/8	2 1/4	1/4	2.1
6L32P	3.20	3.20	P1	2B	-	3 1/8	1 11/16	1 15/16	1 3/16	15/16	3	5/8	2 1/4	1/4	2.8
6L34P	3.40	3.40	P1	5B	2 1/2	2 9/16	1 11/16	1 15/16	5/8	3/8	3	—	1 5/16	1/4	2.1
6L36P	3.60	3.60	P1	5B	2 11/16	2 9/16	1 11/16	1 15/16	5/8	3/8	3	—	1 5/16	1/4	2.6
6L38P	3.80	3.80	P1	5B	2 7/8	2 9/16	1 11/16	1 15/16	5/8	3/8	3	—	1 5/16	1/4	2.8
6L40P	4.00	4.00	P1	5B	3 1/16	2 9/16	1 11/16	1 15/16	5/8	3/8	3	—	1 5/16	1/4	3.4
6L42P	4.20	4.20	P1	4S	3 1/4	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	3.9
6L44P	4.40	4.40	P1	4S	3 1/2	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	4.3
6L46P	4.60	4.60	P1	4S	3 11/16	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	4.8
6L48P	4.80	4.80	P1	4S	3 7/8	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	5.1
6L50P	5.00	5.00	P1	4W	4 1/16	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	5.8
6L52P	5.20	5.20	P1	4W	4 1/4	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	6.5
6L54P	5.40	5.40	P1	4W	4 1/2	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	7.0
6L56P	5.60	5.60	P1	4W	4 11/16	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	7.5
6L58P	5.80	5.80	P1	4W	4 7/8	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	8.1
6L60P	6.00	6.00	P1	4W	5 1/16	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	8.3
6L62P	6.20	6.20	P1	4W	5 1/4	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	8.8
6L64P	6.40	6.40	P1	4W	5 1/2	2 3/16	1 11/16	1 15/16	1/4	—	3	5/8	1 5/16	1/4	9.0
6L70Q	7.00	7.00	Q1	7A	5 9/16	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	9.9
6L74Q	7.40	7.40	Q1	7A	6	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	10.8
6L80Q	8.00	8.00	Q1	7A	6 9/16	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	12.0
6L90Q	9.00	9.00	Q1	7A	7 7/8	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	14.1
6L100Q	10.00	10.00	Q1	7A	7 15/16	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	16.1
6L120Q	12.00	12.00	Q1	7A	11	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	22.0
6L140Q	14.00	14.00	Q1	7A	12 1/8	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	27.8
6L160Q	16.00	16.00	Q1	7A	14 9/16	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	30.9
6L180Q	18.00	18.00	Q1	7A	16 7/8	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	36.9
6L200Q	20.00	20.00	Q1	7A	18 1/2	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	38.6
6L240Q	24.00	24.00	Q1	7A	22 3/16	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	47.5
6L300Q	30.00	30.00	Q1	7A	28 1/2	2 25/32	1 11/16	2 1/2	25/32	1/32	4 1/8	3/4	1 3/4	9/32	83.0

STL Bushing Dimensions


Part No.	Dimensions									Bore Range	Wt Lbs.
	M	L	G	X	E	T	U	D	H		
P1	2 3/16"	1 5/16"	5/8"	1 5/16"	1/4"	1 17/32"	13/32"	1 15/16"	3"	1/2" - 1 3/4"	1 1/4
P2	3 3/16	2 5/16	5/8	2 5/16	1/4	2 17/32	13/32	1 15/16	3	3/4 - 1 3/4	1 1/2
Q1	3 25/32	2 1/2	3/4	1 3/4	9/32	1 31/32	17/32	2 7/8	4 1/8	3/4 - 2 11/16	3 1/2

Standard Keyseats


Bore Range	Keyseats
1/2"-9/16"	1/8" x 1/16"
5/8-7/8	3/16 x 3/32
1 5/16-1 1/4	1/4 x 1/8
1 5/16-1 3/8	5/16 x 5/32
1 7/16-1 3/4	3/8 x 3/16
1 13/16-2 1/4	1/2 x 1/4
2 5/16-2 11/16	5/8 x 5/16

1 3/8" Bore Bushings also available with 3/8"x3/16" Keyseat.


Taper Bore Poly-V Sheaves STL




TYPE 3B




TYPE 5B



TYPE 4S



TYPE 4W



TYPE 4A

L8 Specifications--Stock "L" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
8L30P	3.00	3.00	P1	3B	2 1/16	3 1/2	2 1/16	1 15/16	1 3/16	1 5/16	3	5/8	2 5/16	1/4	2.5
8L32P	3.20	3.20	P1	3B	2 1/4	3 1/2	2 1/16	1 15/16	1 3/16	1 5/16	3	5/8	2 5/16	1/4	3.1
8L34P	3.40	3.40	P1	5B	2 1/2	2 15/16	2 1/16	1 15/16	5/8	3/4	3	—	1 5/16	1/4	2.5
8L36P	3.60	3.60	P1	5B	2 11/16	2 15/16	2 1/16	1 15/16	5/8	3/4	3	—	1 5/16	1/4	2.8
8L38P	3.80	3.80	P1	5B	2 7/8	2 15/16	2 1/16	1 15/16	5/8	3/4	3	—	1 5/16	1/4	3.4
8L40P	4.00	4.00	P1	5B	3 1/16	2 15/16	2 1/16	1 15/16	5/8	3/4	3	—	1 5/16	1/4	3.7
8L42P	4.20	4.20	P1	4S	3 1/16	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	4.3
8L44P	4.40	4.40	P1	4S	3 1/2	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	4.6
8L46P	4.60	4.60	P1	4S	3 11/16	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	5.1
8L48P	4.80	4.80	P1	4S	3 7/8	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	5.8
8L50P	5.00	5.00	P1	4W	4 1/16	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	6.5
8L52P	5.20	5.20	P1	4W	4 1/4	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	7.1
8L54P	5.40	5.40	P1	4W	3 15/16	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	8.0
8L56P	5.60	5.60	P1	4W	4 11/16	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	8.3
8L58P	5.80	5.80	P1	4W	4 3/4	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	8.7
8L60P	6.00	6.00	P1	4W	5 1/16	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	9.0
8L62P	6.20	6.20	P1	4W	4 3/4	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	9.5
8L64P	6.40	6.40	P1	4W	4 15/16	2 5/16	2 1/16	1 15/16	—	1/8	3	5/8	1 5/16	1/4	9.8
8L70Q	7.00	7.00	Q1	4A	5 13/16	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	10.8
8L74Q	7.40	7.40	Q1	4A	6	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	11.5
8L80Q	8.00	8.00	Q1	4A	6 15/16	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	13.9
8L90Q	9.00	9.00	Q1	4A	7 7/8	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	15.5
8L100Q	10.00	10.00	Q1	4A	7 13/16	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	18.0
8L120Q	12.00	12.00	Q1	4A	10 7/8	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	23.3
8L140Q	14.00	14.00	Q1	4A	12 1/8	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	31.6
8L160Q	16.00	16.00	Q1	4A	14 9/16	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	35.5
8L180Q	18.00	18.00	Q1	4A	17	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	40.9
8L200Q	20.00	20.00	Q1	4A	18 1/2	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	45.9
8L240Q	24.00	24.00	Q1	4A	23	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	54.0
8L300Q	30.00	30.00	Q1	4A	28 1/2	2 15/16	2 1/16	2 1/2	19/32	5/32	4 1/8	3/4	1 3/4	9/32	87.0

STL Bushing Dimensions


Part No.	Dimensions									Bore Range	Wt Lbs.
	M	L	G	X	E	T	U	D	H		
P1	2 3/16"	1 5/16"	5/8"	1 5/16"	1/4"	1 17/32"	13/32"	1 15/16"	3"	1/2" - 1 3/4"	1 1/4
P2	3 3/16	2 5/16	5/8	2 5/16	1/4	2 17/32	13/32	1 15/16	3	3/4 - 1 3/4	1 1/2
Q1	3 25/32	2 1/2	3/4	1 3/4	9/32	1 31/32	17/32	2 7/8	4 1/8	3/4 - 2 11/16	3 1/2

Standard Keyseats


Bore Range	Keyseats
1/2"-9/16"	1/8" x 1/16"
5/8-7/8	3/16 x 3/32
1 5/16-1 1/4	1/4 x 1/8
1 5/16-1 3/8	5/16 x 5/32
1 7/16-1 3/4	3/8 x 3/16
1 13/16-2 1/4	1/2 x 1/4
2 5/16-2 11/16	5/8 x 5/16

1 3/8" Bore Bushings also available with 3/8"x3/16" Keyseat.


Taper Bore Poly-V Sheaves STL




TYPE 3B



TYPE 5B



TYPE 4W



TYPE 4A

L10 Specifications--Stock "L" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
10L30P	3.00	3.00	P2	3B	2 1/16	3 7/8	2 7/16	2 15/16	1 3/16	1 1/16	3	5/8	2 5/16	1/4	2.8
10L32P	3.20	3.20	P2	3B	2 1/4	3 7/8	2 7/16	2 15/16	1 3/16	1 1/16	3	5/8	2 5/16	1/4	3.5
10L34P	3.40	3.40	P1	5B	2 1/2	3 5/16	2 7/16	1 15/16	5/8	1 1/8	3	—	1 5/16	1/4	2.8
10L36P	3.60	3.60	P1	5B	2 11/16	3 5/16	2 7/16	1 15/16	5/8	1 1/8	3	—	1 5/16	1/4	3.3
10L38P	3.80	3.80	P1	5B	2 1/4	3 5/16	2 7/16	1 15/16	5/8	1 1/8	3	—	1 5/16	1/4	3.8
10L40P	4.00	4.00	P1	5B	3 1/16	3 5/16	2 7/16	1 15/16	5/8	1 1/8	3	—	1 5/16	1/4	4.3
10L42P	4.20	4.20	P1	4W	3 1/4	2 11/16	2 7/16	1 15/16	—	1/2	3	5/8	1 5/16	1/4	4.7
10L44P	4.40	4.40	P1	4W	3 1/2	2 11/16	2 7/16	1 15/16	—	1/2	3	5/8	1 5/16	1/4	5.1
10L46P	4.60	4.60	P1	4W	3 11/16	2 11/16	2 7/16	1 15/16	—	1/2	3	5/8	1 5/16	1/4	5.6
10L48P	4.80	4.80	P1	4W	3 7/8	2 11/16	2 7/16	1 15/16	—	1/2	3	5/8	1 5/16	1/4	6.3
10L50P	5.00	5.00	P1	4W	4 1/16	2 11/16	2 7/16	1 15/16	—	1/2	3	5/8	1 5/16	1/4	6.8
10L52P	5.20	5.20	P1	4W	4 1/4	2 11/16	2 7/16	1 15/16	—	1/2	3	5/8	1 5/16	1/4	7.5
10L54Q	5.40	5.40	Q1	4W	4 1/2	2 25/32	2 7/16	2 1/2	1/16	—	4 1/8	3/4	1 3/4	9/32	8.1
10L56Q	5.60	5.60	Q1	4W	4 11/16	2 25/32	2 7/16	2 1/2	1/16	—	4 1/8	3/4	1 3/4	9/32	8.8
10L58Q	5.80	5.80	Q1	4W	4 7/8	2 25/32	2 7/16	2 1/2	1/16	—	4 1/8	3/4	1 3/4	9/32	9.6
10L60Q	6.00	6.00	Q1	4W	5 1/16	2 25/32	2 7/16	2 1/2	1/16	—	4 1/8	3/4	1 3/4	9/32	10.4
10L62Q	6.20	6.20	Q1	4W	5 1/4	2 25/32	2 7/16	2 1/2	1/16	—	4 1/8	3/4	1 3/4	9/32	11.5
10L64Q	6.40	6.40	Q1	4W	5 1/2	2 25/32	2 7/16	2 1/2	1/16	—	4 1/8	3/4	1 3/4	9/32	11.9
10L70Q	7.00	7.00	Q1	4W	5 9/16	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	12.6
10L74Q	7.40	7.40	Q1	4A	6	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	13.3
10L80Q	8.00	8.00	Q1	4A	6 9/16	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	14.5
10L90Q	9.00	9.00	Q1	4A	7 7/8	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	16.1
10L100Q	10.00	10.00	Q1	4A	7 13/16	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	19.2
10L120Q	12.00	12.00	Q1	4A	10 15/16	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	24.3
10L140Q	14.00	14.00	Q1	4A	12 1/8	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	31.0
10L160Q	16.00	16.00	Q1	4A	14 9/16	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	34.6
10L180Q	18.00	18.00	Q1	4A	17	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	41.1
10L200Q	20.00	20.00	Q1	4A	18 1/2	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	45.3
10L240Q	24.00	24.00	Q1	4A	22 3/16	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	61.5
10L300Q	30.00	30.00	Q1	4A	28 1/2	3 1/8	2 7/16	2 1/2	13/32	11/32	4 1/8	3/4	1 3/4	9/32	94.0

STL Bushing Dimensions


Part No.	Dimensions									Bore Range	Wt Lbs.
	M	L	G	X	E	T	U	D	H		
P1	2 3/16"	1 5/16"	5/8"	1 5/16"	1/4"	1 17/32"	13/32"	1 15/16"	3"	1/2" - 1 3/4"	1 1/4
P2	3 3/16	2 5/16	5/8	2 5/16	1/4	2 17/32	13/32	1 15/16	3	3/4 - 1 3/4	1 1/2
Q1	3 25/32	2 1/2	3/4	1 3/4	9/32	1 31/32	17/32	2 7/8	4 1/8	3/4 - 2 11/16	3 1/2

Standard Keyseats


Bore Range	Keyseats
1/2"-9/16"	1/8" x 1/16"
5/8-7/8	3/16 x 3/32
1 5/16-1 1/4	1/4 x 1/8
1 5/16-1 3/8	5/16 x 5/32
1 7/16- 1 3/4	3/8 x 3/16
1 13/16-2 1/4	1/2 x 1/4
2 5/16-2 11/16	5/8 x 5/16

1 3/8" Bore Bushings also available with 3/8"x3/16" Keyseat.


Taper Bore Poly-V Sheaves STL




TYPE 3B



TYPE 5B



TYPE 4W



TYPE 4A

L12 Specifications--Stock "L" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
12L30P	3.00	3.00	P2	3B	2 1/16	4 1/4	2 13/16	2 15/16	1 3/16	1 1/16	3	5/8	2 5/16	1/4	3.1
12L32P	3.20	3.20	P2	3B	2 1/4	4 1/4	2 13/16	2 15/16	1 3/16	1 1/16	3	5/8	2 5/16	1/4	3.6
12L34P	3.40	3.40	P1	5B	2 1/2	3 11/16	2 13/16	1 15/16	5/8	1 1/2	3	—	1 5/16	1/4	3.0
12L36P	3.60	3.60	P1	5B	2 11/16	3 11/16	2 13/16	1 15/16	5/8	1 1/2	3	—	1 5/16	1/4	3.6
12L38P	3.80	3.80	P1	5B	2 7/8	3 11/16	2 13/16	1 15/16	5/8	1 1/2	3	—	1 5/16	1/4	4.0
12L40P	4.00	4.00	P1	5B	3 1/16	3 11/16	2 13/16	1 15/16	5/8	1 1/2	3	—	1 5/16	1/4	4.7
12L42P	4.20	4.20	P1	4W	3 1/4	3 1/16	2 13/16	1 15/16	—	7/8	3	5/8	1 5/16	1/4	5.0
12L44P	4.40	4.40	P1	4W	3 1/2	3 1/16	2 13/16	1 15/16	—	7/8	3	5/8	1 5/16	1/4	5.5
12L46P	4.60	4.60	P1	4W	3 11/16	3 1/16	2 13/16	1 15/16	—	7/8	3	5/8	1 5/16	1/4	6.0
12L48P	4.80	4.80	P1	4W	3 7/8	3 1/16	2 13/16	1 15/16	—	7/8	3	5/8	1 5/16	1/4	6.9
12L50P	5.00	5.00	P1	4W	4 1/16	3 1/16	2 13/16	1 15/16	—	7/8	3	5/8	1 5/16	1/4	7.5
12L52P	5.20	5.20	P1	4W	4 1/4	3 1/16	2 13/16	1 15/16	—	7/8	3	5/8	1 5/16	1/4	7.7
12L54Q	5.40	5.40	Q1	4W	4 1/2	3 3/32	2 13/16	2 1/2	—	5/16	4 1/8	3/4	1 3/4	9/32	8.6
12L56Q	5.60	5.60	Q1	4W	4 11/16	3 3/32	2 13/16	2 1/2	—	5/16	4 1/8	3/4	1 3/4	9/32	9.3
12L58Q	5.80	5.80	Q1	4W	4 7/8	3 3/32	2 13/16	2 1/2	—	5/16	4 1/8	3/4	1 3/4	9/32	10.3
12L60Q	6.00	6.00	Q1	4W	5 1/16	3 3/32	2 13/16	2 1/2	—	5/16	4 1/8	3/4	1 3/4	9/32	11.1
12L62Q	6.20	6.20	Q1	4W	5 1/4	3 3/32	2 13/16	2 1/2	—	5/16	4 1/8	3/4	1 3/4	9/32	11.9
12L64Q	6.40	6.40	Q1	4W	5 1/2	3 3/32	2 13/16	2 1/2	—	5/16	4 1/8	3/4	1 3/4	9/32	12.9
12L70Q	7.00	7.00	Q1	4W	5 9/16	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	13.6
12L74Q	7.40	7.40	Q1	4W	6	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	14.0
12L80Q	8.00	8.00	Q1	4A	6 9/16	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	15.0
12L90Q	9.00	9.00	Q1	4A	7 7/8	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	17.0
12L100Q	10.00	10.00	Q1	4A	7 13/16	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	20.2
12L120Q	12.00	12.00	Q1	4A	10 15/16	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	27.4
12L140Q	14.00	14.00	Q1	4A	12 1/8	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	32.9
12L160Q	16.00	16.00	Q1	4A	14 9/16	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	35.5
12L180Q	18.00	18.00	Q1	4A	17	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	42.9
12L200Q	20.00	20.00	Q1	4A	18 1/2	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	46.5
12L240Q	24.00	24.00	Q1	4A	22 3/16	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	60.0
12L300Q	30.00	30.00	Q1	4A	28 1/2	3 5/16	2 13/16	2 1/2	7/32	17/32	4 1/8	3/4	1 3/4	9/32	93.0

Bushing Dimensions


Part No.	Dimensions									Bore Range	Wt Lbs.
	M	L	G	X	E	T	U	D	H		
P1	2 3/16"	1 5/16"	5/8"	1 5/16"	1/4"	1 17/32"	13/32"	1 15/16"	3"	1/2" - 1 3/4"	1 1/4
P2	3 3/16	2 5/16	5/8	2 5/16	1/4	2 17/32	13/32	1 15/16	3	3/4 - 1 3/4	1 1/2
Q1	3 25/32	2 1/2	3/4	1 3/4	9/32	1 31/32	17/32	2 7/8	4 1/8	3/4 - 2 11/16	3 1/2

Standard Keyseats


Bore Range	Keyseats
1/2"-9/16"	1/8" x 1/16"
5/8-7/8	3/16 x 3/32
1 5/16-1 1/4	1/4 x 1/8
1 5/16-1 3/8	5/16 x 5/32
1 7/16-1 3/4	3/8 x 3/16
1 13/16-2 1/4	1/2 x 1/4
2 5/16-2 11/16	5/8 x 5/16

1 3/8" Bore Bushings also available with 3/8"x3/16" Keyseat.


Taper Bore Poly-V Sheaves STL




TYPE 4W



TYPE 4A



TYPE 6W



L14 Specifications--Stock "L" Sheaves


PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
14L54Q	5.40	5.40	Q1	4W	4 1/2	3 21/32	3 3/16	2 1/2	—	11/16	4 1/8	3/4	1 3/4	9/32	8.9
14L56Q	5.60	5.60	Q1	4W	4 11/16	3 21/32	3 3/16	2 1/2	—	11/16	4 1/8	3/4	1 3/4	9/32	10.0
14L58Q	5.80	5.80	Q1	4W	4 1/8	3 21/32	3 3/16	2 1/2	—	11/16	4 1/8	3/4	1 3/4	9/32	10.7
14L60Q	6.00	6.00	Q1	4W	5 1/16	3 21/32	3 3/16	2 1/2	—	11/16	4 1/8	3/4	1 3/4	9/32	12.1
14L62Q	6.20	6.20	Q1	4W	5 1/4	3 21/32	3 3/16	2 1/2	—	11/16	4 1/8	3/4	1 3/4	9/32	12.6
14L64Q	6.40	6.40	Q1	4W	5 1/2	3 21/32	3 3/16	2 1/2	—	11/16	4 1/8	3/4	1 3/4	9/32	13.5
14L70Q	7.00	7.00	Q1	4W	5 9/16	3 1/2	3 3/16	2 1/2	1/32	23/32	4 1/8	3/4	1 3/4	9/32	13.7
14L74Q	7.40	7.40	Q1	4W	6	3 1/2	3 3/16	2 1/2	1/32	23/32	4 1/8	3/4	1 3/4	9/32	14.8
14L80Q	8.00	8.00	Q1	4A	6 9/16	3 1/2	3 3/16	2 1/2	1/32	23/32	4 1/8	3/4	1 3/4	9/32	16.0
14L90R	9.00	9.00	R1	4A	7 1/4	3 3/4	3 3/16	2 7/8	9/32	19/32	5 3/8	7/8	2	9/32	23.5
14L100R	10.00	10.00	R1	4A	7 15/16	3 3/4	3 3/16	2 7/8	9/32	19/32	5 3/8	7/8	2	9/32	25.5
14L120R	12.00	12.00	R1	4A	10 5/16	3 3/4	3 3/16	2 7/8	9/32	19/32	5 3/8	7/8	2	9/32	30.1
14L140R	14.00	14.00	R1	4A	12 1/8	3 3/4	3 3/16	2 7/8	9/32	19/32	5 3/8	7/8	2	9/32	34.5
14L160R	16.00	16.00	R1	4A	14 9/16	3 3/4	3 3/16	2 7/8	9/32	19/32	5 3/8	7/8	2	9/32	40.0
14L180R	18.00	18.00	R1	4A	16 15/16	3 3/4	3 3/16	2 7/8	9/32	19/32	5 3/8	7/8	2	9/32	43.5
14L200R	20.00	20.00	R1	4A	18 7/16	3 3/4	3 3/16	2 7/8	9/32	19/32	5 3/8	7/8	2	9/32	50.5
14L240R	24.00	24.00	R1	4A	22 3/16	3 3/4	3 3/16	2 7/8	9/32	19/32	5 3/8	7/8	2	9/32	61.5
14L300R	30.00	30.00	R1	4A	28 1/2	3 3/4	3 3/16	2 7/8	9/32	19/32	5 3/8	7/8	2	9/32	98.2

L16 Specifications--Stock "L" Sheaves


PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
16L54Q	5.40	5.40	Q1	4W	4 1/2	3 27/32	3 9/16	2 1/2	—	1 1/16	4 1/8	3/4	1 3/4	9/32	9.5
16L56Q	5.60	5.60	Q1	4W	4 11/16	3 27/32	3 9/16	2 1/2	—	1 1/16	4 1/8	3/4	1 3/4	9/32	10.5
16L58Q	5.80	5.80	Q1	4W	4 7/8	3 27/32	3 9/16	2 1/2	—	1 1/16	4 1/8	3/4	1 3/4	9/32	11.4
16L60Q	6.00	6.00	Q1	4W	5 1/16	3 27/32	3 9/16	2 1/2	—	1 1/16	4 1/8	3/4	1 3/4	9/32	12.4
16L62Q	6.20	6.20	Q1	4W	5 5/16	3 27/32	3 9/16	2 1/2	—	1 1/16	4 1/8	3/4	1 3/4	9/32	13.6
16L64Q	6.40	6.40	Q1	4W	5 1/2	3 27/32	3 9/16	2 1/2	—	1 1/16	4 1/8	3/4	1 3/4	9/32	14.3
16L70Q	7.00	7.00	Q1	6W	5 9/16	3 11/16	3 9/16	2 1/2	5/32	29/32	4 1/8	3/4	1 3/4	9/32	14.8
16L74Q	7.40	7.40	Q1	6W	6 7/16	3 11/16	3 9/16	2 1/2	5/32	29/32	4 1/8	3/4	1 3/4	9/32	15.3
16L80Q	8.00	8.00	Q1	4A	6 9/16	3 11/16	3 9/16	2 1/2	5/32	29/32	4 1/8	3/4	1 3/4	9/32	17.1
16L90R	9.00	9.00	R1	4A	7 15/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	24.1
16L100R	10.00	10.00	R1	4A	7 15/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	26.9
16L120R	12.00	12.00	R1	4A	10 5/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	30.9
16L140R	14.00	14.00	R1	4A	12 1/8	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	38.5
16L160R	16.00	16.00	R1	4A	14 9/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	43.8
16L180R	18.00	18.00	R1	4A	16 5/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	49.3
16L200R	20.00	20.00	R1	4A	18 7/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	53.0
16L240R	24.00	24.00	R1	4A	22 3/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	64.5
16L300R	30.00	30.00	R1	4A	28 1/2	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	103.5

Shijiazhuang CAPT Power Transmission Co., Ltd.


Taper Bore Poly-V Sheaves STL




TYPE 4W



TYPE 6W



TYPE 4A



L20 Specifications--Stock "L" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
20L54Q	5.40	5.40	Q1	4W	4 1/2	4 17/32	4 1/4	2 1/2	—	1 3/4	4 1/8	3/4	1 3/4	9/32	10.4
20L56Q	5.60	5.60	Q1	4W	4 11/16	4 17/32	4 1/4	2 1/2	—	1 3/4	4 1/8	3/4	1 3/4	9/32	11.3
20L58Q	5.80	5.80	Q1	4W	4 7/8	4 17/32	4 1/4	2 1/2	—	1 3/4	4 1/8	3/4	1 3/4	9/32	12.4
20L60Q	6.00	6.00	Q1	4W	5 1/16	4 17/32	4 1/4	2 1/2	—	1 3/4	4 1/8	3/4	1 3/4	9/32	13.5
20L62Q	6.20	6.20	Q1	4W	5 1/4	4 17/32	4 1/4	2 1/2	—	1 3/4	4 1/8	3/4	1 3/4	9/32	15.0
20L64Q	6.40	6.40	Q1	4W	5 1/2	4 17/32	4 1/4	2 1/2	—	1 3/4	4 1/8	3/4	1 3/4	9/32	15.6
20L70Q	7.00	7.00	Q1	6W	5 9/16	4 1/4	4 1/4	2 1/2	1/2	1 1/4	4 1/8	3/4	1 3/4	9/32	18.8
20L74Q	7.40	7.40	Q1	6W	6	4 1/4	4 1/4	2 1/2	1/2	1 1/4	4 1/8	3/4	1 3/4	9/32	21.7
20L80Q	8.00	8.00	Q1	4A	6 9/16	4 1/4	4 1/4	2 1/2	1/2	1 1/4	4 1/8	3/4	1 3/4	9/32	23.2
20L90R	9.00	9.00	R1	4A	7 1/4	4 9/32	4 1/4	2 7/8	1/4	1 1/8	5 3/8	7/8	2	9/32	26.4
20L100R	10.00	10.00	R1	4A	7 15/16	4 9/32	4 1/4	2 7/8	1/4	1 1/8	5 3/8	7/8	2	9/32	29.9
20L120R	12.00	12.00	R1	4A	10 5/16	4 9/32	4 1/4	2 7/8	1/4	1 1/8	5 3/8	7/8	2	9/32	34.0
20L140R	14.00	14.00	R1	4A	12 1/8	4 9/32	4 1/4	2 7/8	1/4	1 1/8	5 3/8	7/8	2	9/32	41.6
20L160R	16.00	16.00	R1	4A	14 9/16	4 9/32	4 1/4	2 7/8	1/4	1 1/8	5 3/8	7/8	2	9/32	46.9
20L180R	18.00	18.00	R1	4A	16 15/16	4 9/32	4 1/4	2 7/8	1/4	1 1/8	5 3/8	7/8	2	9/32	54.0
20L200R	20.00	20.00	R1	4A	18 7/16	4 9/32	4 1/4	2 7/8	1/4	1 1/8	5 3/8	7/8	2	9/32	56.5
20L240R	24.00	24.00	R1	4A	22 3/16	4 9/32	4 1/4	2 7/8	1/4	1 1/8	5 3/8	7/8	2	9/32	72.5
20L300R	30.00	30.00	R1	4A	28 1/2	4 9/32	4 1/4	2 7/8	1/4	1 1/8	5 3/8	7/8	2	9/32	112.0

STL Bushing Dimensions

Part No.	Dimensions									Bore Range	Wt Lbs.
	M	L	G	X	E	T	U	D	H		
Q1	3 25/32	2 1/2	3/4	1 3/4	9/32	1 31/32	17/32	2 7/8	4 1/8	3/4 - 2 11/16	3 1/2
R1	3 5/32	2 7/8	7/8	2	9/32	2 1/4	5/8	4	5 3/8	1 1/8 - 3 3/4	7 1/2




Standard Keyseats

Bore Range	Keyseats
5/8-7/8	3/16 x 3/32
1 5/16-1 1/4	1/4 x 1/8
1 5/16-1 3/8	5/16 x 5/32
1 7/16- 1 3/4	3/8 x 3/16
1 13/16-2 1/4	1/2 x 1/4
2 5/16-2 11/16	5/8 x 5/16
3 3/8-3 3/4	7/8 x 7/16


1 3/8" Bore Bushings also available with 3/8"x3/16" Keyseat.

Shijiazhuang CAPT Power Transmission Co., Ltd.


Taper Bore Poly-V Sheaves STL




TYPE 4W



TYPE 4A



STL Taper Bushings



Standard Keyseats

Bore	Keyseat	Bore	Keyseat
3/4" - 7/8"	3/16" x 3/32"	2 5/16" - 2 3/4"	5/8" x 5/16"
15/16 - 1 1/4	1/4" x 1/8"	2 13/16 - 3 1/4	3/4 x 3/8
1 5/16 - 1 3/8	5/16 x 5/32	3 3/8 - 3 3/4	7/8 x 7/16
1 7/16 - 1 3/4	3/8 x 3/16	3 7/8 - 4 1/4	1 x 1/2
1 13/16 - 2 1/4	1/2 x 1/4		

1 3/8" Bore Bushings(except R_2) also available with 3/8"x3/16" Keyseat.

STL Bushing Dimensions


Part No.	Dimensions									Bore Range	Wt Lbs.
	M	L	G	X	E	T	U	D	H		
Q_1	2 25/32	2 1/2	3/4	1 3/4	9/32	1 31/32	17/32	2 7/8	4 1/8	3/4 - 2 11/16	3 1/2
R_1	3 5/32	2 7/8	7/8	2	9/32	2 1/4	5/8	4	5 3/8	1 1/8 - 3 3/4	7 1/2

M6 Specifications--Stock "M" Sheaves


PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
6M70Q	7.00	7.00	Q_1	4W	5 5/8	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	14.2
6M74Q	7.40	7.40	Q_1	4W	5 9/16	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	14.5
6M76Q	7.60	7.60	Q_1	4W	6	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	15.4
6M80Q	8.00	8.00	Q_1	4W	6 9/16	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	16.4
6M84Q	8.40	8.40	Q_1	4W	6 9/16	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	17.8
6M86Q	8.60	8.60	Q_1	4A	7 1/8	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	19.7
6M90Q	9.00	9.00	Q_1	4A	7 1/8	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	21.3
6M92Q	9.20	9.20	Q_1	4A	7 9/16	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	21.7
6M96Q	9.60	9.60	Q_1	4A	7 13/16	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	22.0
6M100Q	10.00	10.00	Q_1	4A	7 13/16	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	22.3
6M106Q	10.60	10.60	Q_1	4A	8 3/8	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	24.5
6M110Q	11.00	11.00	Q_1	4A	9 1/2	3 11/32	2 7/8	2 1/2	3/16	9/16	4 1/8	3/4	1 3/4	9/32	25.6
6M120R	12.00	12.00	R_1	4A	10 5/16	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	30.3
6M130R	13.00	13.00	R_1	4A	11 1/4	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	33.0
6M140Q	14.00	14.00	R_1	4A	12 1/4	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	36.0
6M150R	15.00	15.00	R_1	4A	13 1/2	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	38.9
6M160R	16.00	16.00	R_1	4A	14 1/4	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	42.0
6M180R	18.00	18.00	R_1	4A	16 1/4	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	48.0
6M200R	20.00	20.00	R_1	4A	18 1/4	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	54.5
6M240R	24.00	24.00	R_1	4A	22	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	65.5
6M300R	30.00	30.00	R_1	4A	28 1/2	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	99.0
6M360R	36.00	36.00	R_1	4A	34 3/16	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	122.0
6M440R	44.00	44.00	R_1	4A	42 1/16	3 19/32	2 7/8	2 7/8	7/16	7/16	5 3/8	7/8	2	9/32	167.0

Shijiazhuang CAPT Power Transmission Co., Ltd.


Taper Bore Poly-V Sheaves STL




TYPE 6W



TYPE 4A



STL Taper Bushings



Standard Keyseats

Bore	Keyseat	Bore	Keyseat
3/4" - 7/8"	3/16" x 3/32"	2 5/16" - 2 3/4"	5/8" x 5/16"
15/16 - 1 1/4	1/4" x 1/8"	2 13/16 - 3 1/4	3/4 x 3/8
1 5/16 - 1 3/8	5/16 x 5/32	3 3/8 - 3 3/4	7/8 x 7/16
1 7/16 - 1 3/4	3/8 x 3/16	3 7/8 - 4 1/4	1 x 1/2
1 13/16 - 2 1/4	1/2 x 1/4		

1 3/8" Bore Bushings(except R2) also available with 3/8"x3/16" Keyseat.


STL Bushing Dimensions

Part No.	Dimensions									Bore Range	Wt Lbs.
	M	L	G	X	E	T	U	D	H		
Q1	2 25/31	2 1/2	3/4	1 3/4	9/32	1 31/32	17/32	2 7/8	4 1/8	3/4 - 2 11/16	3 1/2
R1	3 5/32	2 7/8	7/8	2	9/32	2 1/4	5/8	4	5 3/8	1 1/8 - 3 3/4	7 1/2


M8 Specifications--Stock "M" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
8M70Q	7.00	7.00	Q1	6W	5 5/8	3 11/16	3 9/16	2 1/2	5/32	29/32	4 1/8	3/4	1 3/4	9/32	17.6
8M74Q	7.40	7.40	Q1	6W	6	3 11/16	3 9/16	2 1/2	5/32	29/32	4 1/8	3/4	1 3/4	9/32	18.1
8M76Q	7.60	7.60	Q1	6W	6	3 11/16	3 9/16	2 1/2	5/32	29/32	4 1/8	3/4	1 3/4	9/32	18.7
8M80Q	8.00	8.00	Q1	6W	6 9/16	3 11/16	3 9/16	2 1/2	5/32	29/32	4 1/8	3/4	1 3/4	9/32	19.1
8M84Q	8.40	8.40	Q1	6W	6 9/16	3 11/16	3 9/16	2 1/2	5/32	29/32	4 1/8	3/4	1 3/4	9/32	20.3
8M86Q	8.60	8.60	Q1	6W	7 1/8	3 11/16	3 9/16	2 1/2	5/32	29/32	4 1/8	3/4	1 3/4	9/32	25.3
8M90R	9.00	9.00	R1	6W	7 1/2	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	26.0
8M92R	9.20	9.20	R1	6W	7 9/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	27.3
8M96R	9.60	9.60	R1	6W	7 15/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	28.1
8M100R	10.00	10.00	R1	6W	7 15/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	29.0
8M106R	10.60	10.60	R1	6W	8 1/2	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	32.1
8M110R	11.00	11.00	R1	4A	8 13/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	33.8
8M120R	12.00	12.00	R1	4A	10 5/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	34.6
8M130R	13.00	13.00	R1	4A	11 1/4	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	37.3
8M140R	14.00	14.00	R1	4A	12 1/4	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	41.4
8M150R	15.00	15.00	R1	4A	13 1/4	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	42.6
8M160R	16.00	16.00	R1	4A	14 9/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	47.3
8M180R	18.00	18.00	R1	4A	16 1/4	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	51.3
8M200R	20.00	20.00	R1	4A	18 1/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	60.0
8M240R	24.00	24.00	R1	4A	22 3/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	74.0
8M300R	30.00	30.00	R1	4A	28 1/2	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	112.0
8M360R	36.00	36.00	R1	4A	34 3/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	139.0
8M440R	44.00	44.00	R1	4A	42 1/16	3 15/16	3 9/16	2 7/8	3/32	25/32	5 3/8	7/8	2	9/32	200.0


Taper Bore Poly-V Sheaves STL




TYPE 6W



TYPE 4A



STL Taper Bushings



Standard Keyseats

Bore	Keyseat	Bore	Keyseat
3/4" - 7/8"	3/16" x 3/32"	2 5/16" - 2 3/4"	5/8" x 5/16"
15/16 - 1 1/4	1/4" x 1/8"	2 13/16 - 3 1/4	3/4 x 3/8
1 5/16 - 1 3/8	5/16 x 5/32	3 3/8 - 3 3/4	7/8 x 7/16
1 7/16 - 1 3/4	3/8 x 3/16	3 7/8 - 4 1/4	1 x 1/2
1 13/16 - 2 1/4	1/2 x 1/4		

1 3/8" Bore Bushings(except R2) also available with 3/8"x3/16" Keyseat.


STL Bushing Dimensions

Part No.	Dimensions									Bore Range	Wt Lbs.
	M	L	G	X	E	T	U	D	H		
Q1	3 25/32	2 1/2	3/4	1 3/4	9/32	1 31/32	17/32	2 7/8	4 1/8	3/4 - 2 11/16	3 1/2
R1	3 5/32	2 7/8	7/8	2	9/32	2 1/4	5/8	4	5 3/8	1 1/8 - 3 3/4	7 1/2


M10 Specifications--Stock "M" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
10M70Q	7.00	7.00	Q1	6W	5 9/16	4 5/16	4 5/16	2 1/2	17/32	1 9/32	4 1/8	3/4	1 3/4	9/32	19.5
10M74Q	7.40	7.40	Q1	6W	6	4 5/16	4 5/16	2 1/2	17/32	1 9/32	4 1/8	3/4	1 3/4	9/32	22.4
10M76Q	7.60	7.60	Q1	6W	6	4 5/16	4 5/16	2 1/2	17/32	1 9/32	4 1/8	3/4	1 3/4	9/32	24.0
10M80Q	8.00	8.00	Q1	6W	6 9/16	4 5/16	4 5/16	2 1/2	17/32	1 9/32	4 1/8	3/4	1 3/4	9/32	25.3
10M84Q	8.40	8.40	Q1	6W	6 9/16	4 5/16	4 5/16	2 1/2	17/32	1 9/32	4 1/8	3/4	1 3/4	9/32	26.0
10M86Q	8.60	8.60	Q1	6W	7 1/8	4 5/16	4 5/16	2 1/2	17/32	1 9/32	4 1/8	3/4	1 3/4	9/32	27.1
10M90R	9.00	9.00	R1	6W	7 1/4	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	28.5
10M92R	9.20	9.20	R1	6W	7 1/4	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	30.0
10M96R	9.60	9.60	R1	6W	7 3/8	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	30.8
10M100R	10.00	10.00	R1	6W	7 15/16	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	32.5
10M106R	10.60	10.60	R1	6W	8 1/2	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	35.5
10M110R	11.00	11.00	R1	4A	8 13/16	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	38.0
10M120R	12.00	12.00	R1	4A	10 5/16	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	39.1
10M130R	13.00	13.00	R1	4A	11 1/4	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	41.4
10M140R	14.00	14.00	R1	4A	12 1/4	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	45.5
10M150R	15.00	15.00	R1	4A	13 1/4	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	47.4
10M160R	16.00	16.00	R1	4A	14 9/16	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	51.0
10M180R	18.00	18.00	R1	4A	16 1/4	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	60.3
10M200R	20.00	20.00	R1	4A	18 1/4	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	68.3
10M240R	24.00	24.00	R1	4A	22 3/16	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	84.5
10M300R	30.00	30.00	R1	4A	28 1/2	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	119.0
10M360R	36.00	36.00	R1	4A	34 3/16	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	171.0
10M440R	44.00	44.00	R1	4A	42 3/16	4 5/16	4 5/16	2 7/8	9/32	1 5/32	5 3/8	7/8	2	9/32	218.0

Taper Bore Poly-V Sheaves STL



TYPE 6W



TYPE 4A

STL Bushing Dimensions

Part No.	Dimensions									Bore Range	Wt Lbs.
	M	L	G	X	E	T	U	D	H		
R1	3 5/32	2 7/8	7/8	2	9/32	2 1/4	5/8	4	5 3/8	1 1/8 - 3 3/4	7 1/2
R2	5 5/32	4 7/8	7/8	4	9/32	4 1/4	5/8	4	5 3/8	1 3/8 - 3 5/8	11
S1	4 3/4	4 3/8	1 1/16	3 5/16	3/8	3 5/8	3/4	4 5/8	6 3/8	1 11/16 - 4 1/4	13 1/2

M12 Specifications--Stock "M" Sheaves


PART NO.	Diameters		Bushi	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
12M90R	9.00	9.00	R1	6W	7 1/4	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	31.6
12M92R	9.20	9.20	R1	6W	7 3/8	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	33.5
12M96R	9.60	9.60	R1	6W	7 3/8	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	34.3
12M100R	10.00	10.00	R1	6W	7 15/16	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	35.0
12M106R	10.60	10.60	R1	6W	8 1/2	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	39.4
12M110R	11.00	11.00	R1	4A	8 13/16	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	40.5
12M120R	12.00	12.00	R1	4A	10 5/16	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	41.4
12M130R	13.00	13.00	R1	4A	11 1/4	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	45.3
12M140R	14.00	14.00	R1	4A	12 1/4	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	49.4
12M150R	15.00	15.00	R1	4A	13 1/4	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	51.0
12M160R	16.00	16.00	R1	4A	14 1/4	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	56.0
12M180R	18.00	18.00	R1	4A	16 1/4	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	64.5
12M200R	20.00	20.00	R1	4A	18 3/16	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	71.5
12M240R	24.00	24.00	R1	4A	22 3/16	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	91.5
12M300R	30.00	30.00	R1	4A	28 3/16	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	129.0
12M360R	36.00	36.00	R1	4A	34 3/16	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	190.0
12M440R	44.00	44.00	R1	4A	42 3/16	5 1/16	5 1/16	2 7/8	21/32	1 17/32	5 3/8	7/8	2	9/32	237.0

M14 Specifications--Stock "M" Sheaves


PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
14M90R	9.00	9.00	R2	6W	7 1/4	6 1/16	5 13/16	4 7/8	1/32	29/32	5 3/8	7/8	4	9/32	49.8
14M92R	9.20	9.20	R2	6W	7 1/4	6 1/16	5 13/16	4 7/8	1/32	29/32	5 3/8	7/8	4	9/32	53.0
14M96R	9.60	9.60	R2	6W	7 3/8	6 1/16	5 13/16	4 7/8	1/32	29/32	5 3/8	7/8	4	9/32	54.0
14M100R	10.00	10.00	R2	6W	7 15/16	6 1/16	5 13/16	4 7/8	1/32	29/32	5 3/8	7/8	4	9/32	55.0
14M106R	10.60	10.60	R2	6W	8 1/2	6 1/16	5 13/16	4 7/8	1/32	29/32	5 3/8	7/8	4	9/32	59.8
14M110R	11.00	11.00	R2	6W	8 13/16	6 1/16	5 13/16	4 7/8	1/32	29/32	5 3/8	7/8	4	9/32	60.5
14M120S	12.00	12.00	S1	6A	10 15/16	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	64.0
14M130S	13.00	13.00	S1	6A	11 1/4	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	71.5
14M140S	14.00	14.00	S1	6A	12 1/4	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	77.5
14M150S	15.00	15.00	S1	6A	13 1/4	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	81.5
14M160S	16.00	16.00	S1	6A	14 1/4	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	87.0
14M180S	18.00	18.00	S1	6A	16 1/4	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	96.5
14M200S	20.00	20.00	S1	6A	18 3/16	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	109.0
14M240S	24.00	24.00	S1	6A	22 3/16	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	131.0
14M300S	30.00	30.00	S1	6A	28 3/16	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	168.0
14M360S	36.00	36.00	S1	6A	34 3/16	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	223.0
14M440S	44.00	44.00	S1	6A	42 3/16	6	5 13/16	4 3/8	3/16	1 1/4	6 3/8	1 1/16	3 5/16	3/8	280.0

Shijiazhuang CAPT Power Transmission Co., Ltd.

Taper Bore Poly-V Sheaves STL



TYPE 6W



TYPE 4A

Standard Keyseats

Bore	Bushing	Bore	Keyseat
3/4" - 7/8"	3/16" x 3/32"	2 5/16" - 2 3/4"	5/8" x 5/16"
15/16 - 1 1/4	1/4" x 1/8"	2 13/16 - 3 1/4	3/4 x 3/8
1 5/16 - 1 3/8	5/16 x 5/32	3 3/8 - 3 3/4	7/8 x 7/16
1 7/16 - 1 3/4	3/8 x 3/16	3 7/8 - 4 1/4	1 x 1/2
1 13/16 - 2 1/4	1/2 x 1/4		

1 3/8" Bore Bushings(except R2) also available with 3/8"x3/16" Keyseat.

M16 Specifications--Stock "M" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
16M90R	9.00	9.00	R2	6W	7 1/4	6 9/16	6 9/16	4 7/8	13/32	1 9/32	5 3/8	7/8	4	9/32	53.5
16M92R	9.20	9.20	R2	6W	7 3/8	6 9/16	6 9/16	4 7/8	13/32	1 9/32	5 3/8	7/8	4	9/32	55.5
16M96R	9.60	9.60	R2	6W	7 7/8	6 9/16	6 9/16	4 7/8	13/32	1 9/32	5 3/8	7/8	4	9/32	58.5
16M100R	10.00	10.00	R2	6W	7 15/16	6 9/16	6 9/16	4 7/8	13/32	1 9/32	5 3/8	7/8	4	9/32	59.8
16M106R	10.60	10.60	R2	6W	8 1/2	6 9/16	6 9/16	4 7/8	13/32	1 9/32	5 3/8	7/8	4	9/32	60.0
16M110R	11.00	11.00	R2	4A	8 13/16	6 9/16	6 9/16	4 7/8	13/32	1 9/32	5 3/8	7/8	4	9/32	64.5
16M120S	12.00	12.00	S1	4A	10 15/16	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	67.0
16M130S	13.00	13.00	S1	4A	11 1/4	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	74.0
16M140S	14.00	14.00	S1	4A	12 1/4	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	80.0
16M150S	15.00	15.00	S1	4A	13 1/4	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	86.0
16M160S	16.00	16.00	S1	4A	14 1/4	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	91.0
16M180S	18.00	18.00	S1	4A	16 1/4	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	104.0
16M200S	20.00	20.00	S1	4A	18 3/16	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	113.0
16M240S	24.00	24.00	S1	4A	22 3/16	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	140.0
16M300S	30.00	30.00	S1	4A	28 3/16	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	182.0
16M360S	36.00	36.00	S1	4A	34 3/16	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	235.0
16M440S	44.00	44.00	S1	4A	42 3/16	6 9/16	6 9/16	4 3/8	9/16	1 5/8	6 3/8	1 1/16	3 5/16	3/8	300.0

M20 Specifications--Stock "M" Sheaves

PART NO.	Diameters		Bush	Type	Dimensions										Wt Less Bush
	OD	PD			ID	OL	F	L	P	C	H	G	X	E	
20M90R	9.00	9.00	R2	6W	7 1/4	8	8	4 7/8	1 1/2	1 5/8	5 3/8	7/8	4	9/32	57.5
20M92R	9.20	9.20	R2	6W	7 3/8	8	8	4 7/8	1 1/2	1 5/8	5 3/8	7/8	4	9/32	60.0
20M96R	9.60	9.60	R2	6W	7 7/8	8	8	4 7/8	1 1/2	1 5/8	5 3/8	7/8	4	9/32	63.5
20M100R	10.00	10.00	R2	6W	7 15/16	8	8	4 7/8	1 1/2	1 5/8	5 3/8	7/8	4	9/32	64.0
20M106R	10.60	10.60	R2	6W	8 1/2	8	8	4 7/8	1 1/2	1 5/8	5 3/8	7/8	4	9/32	70.0
20M110R	11.00	11.00	R2	4A	8 13/16	8	8	4 7/8	1 1/8	2	5 3/8	7/8	4	9/32	71.0
20M120S	12.00	12.00	S1	4A	10 15/16	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	74.0
20M130S	13.00	13.00	S1	4A	11 1/4	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	84.5
20M140S	14.00	14.00	S1	4A	12 1/4	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	90.5
20M150S	15.00	15.00	S1	4A	13 1/4	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	96.5
20M160S	16.00	16.00	S1	4A	14 1/4	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	100.0
20M180S	18.00	18.00	S1	4A	16 1/4	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	112.0
20M200S	20.00	20.00	S1	4A	18 3/16	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	127.0
20M240S	24.00	24.00	S1	4A	22 3/16	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	156.0
20M300S	30.00	30.00	S1	4A	28 3/16	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	205.0
20M360S	36.00	36.00	S1	4A	34 3/16	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	264.0
20M440S	44.00	44.00	S1	4A	42 3/16	8	8	4 3/8	1 9/32	2 11/32	6 3/8	1 1/16	3 5/16	3/8	335.0

Shijiazhuang CAPT Power Transmission Co., Ltd.